Ficha Técnica
Technical sheet

BRUMA

Produto | Product


Monocomando embutido de 3 saídas, com chuveiro de mão | *Concealed single lever 3 outlets mixer, with handshower set*

107 110 1XX

IMAGEM* | *IMAGE**



DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

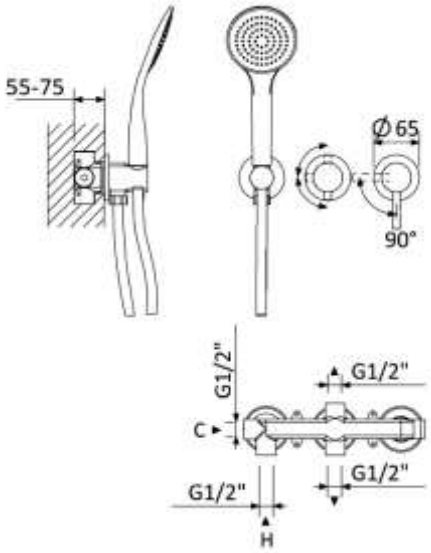

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Monocomando embutido de 3 saídas, com chuveiro de mão;
- Cartucho de discos cerâmicos BRUMA SmoothBreeze®;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- O chuveiro de mão contém um regulador de caudal de 6 l/min;
- Com elemento encastrável 200 240 2NO.

- Concealed single lever 3 outlets mixer, with handshower set;
- Ceramic cartridge BRUMA SmoothBreeze®;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- The hand shower contains a 6 l/min flow regulator;
- With concealed body 200 240 2NO.



DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudal a 3 bar:
- Saída 1 (sem restrição): 13,0 l/min
- Saída 2 (chuveiro de mão): 6,0 l/min
- Saída 3 (sem restrição): 13,0 l/min

Flow rate at 3 bar:
- Outlet 1 (without restrictor): 13,0 l/min
- Outlet 2 Handshower: 6,0 l/min
- Outlet 3 (without restrictor): 13,0 l/min

EFICIÊNCIA HÍDRICA | *WATER LABEL* **A**

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

INFORMAÇÕES IMPORTANTES | *IMPORTANT INFORMATIONS*



* Imagem não contratual | **Non-contractual image*

Ficha Técnica
Technical sheet

BRUMA

Product


Elemento encastrável | *Concealed body*

200 240 2NO

IMAGEM* | *IMAGE**



DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

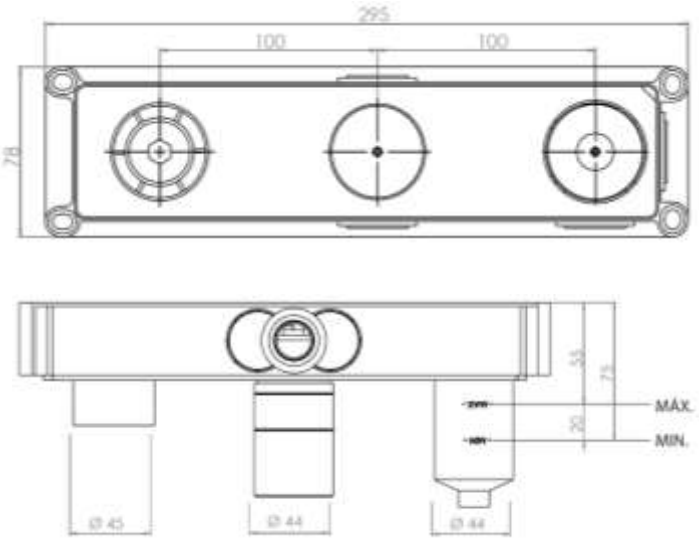

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Elemento encastrável;
- Cartuchos de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- Concealed body;
- Ceramic cartridges;
- Screws and plugs included.


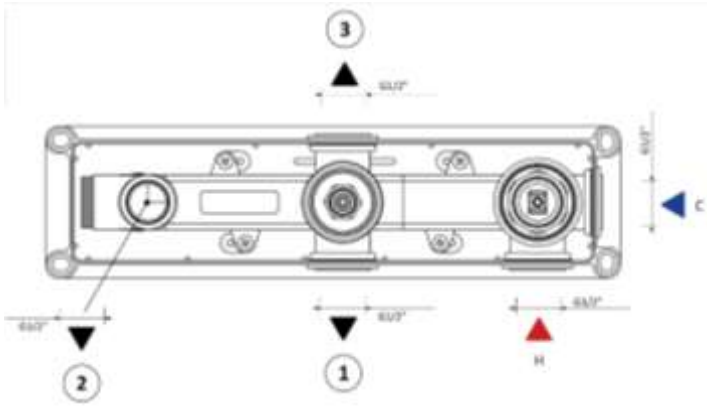


DIAGRAMA CAUDAL | *FLOW DIAGRAM*


Caudal a 3 bar:
- Saída superior (sem restrição): 13,0 l/min.
- Saída lateral (sem restrição): 12,3 l/min.
- Saída inferior (sem restrição): 13,0 l/min.


Flow rate at 3 bar:
- Outlet superior (without restrictor): 13,0 l/min.
- Outlet lateral (without restrictor): 12,3 l/min.
- Outlet inferior (without restrictor): 13,0 l/min.

Inversor
Diverter



Aberto | *Open*





* Imagem não contratual | **Non-contractual image*