Ficha Técnica
Technical sheet

BRUMA

Produto | Product


Torneira electrónica de lavatório, sensor capacitivo - Free | *Capacitive sensor, electronic basin tap - Free*

127 350 0XX

IMAGEM* | *IMAGE**



DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

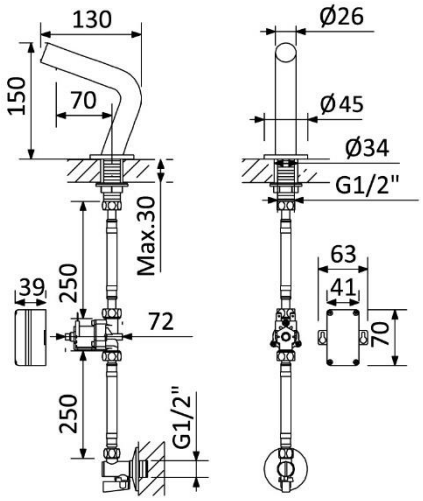


ESPECIFICAÇÕES | *SPECIFICATIONS*

- Torneira electrónica de lavatório, sensor capacitivo – Free;
- Sensor Infravermelho;
- Pressão de funcionamento: Min 0.5 Max. 5 bar;
- Pressão de funcionamento recomendada: 3 bar;
- Resistência à pressão estática: Max. 10 bar;
- Para pressões estáticas superiores a 5 bar deve ser instalado um redutor de pressão;
- 6.0V (4x pilhas tamanho AA)
- Ligações flexíveis;

- Capacitive sensor, electronic basin tap – Free;
- Infrared electronic;
- Flow pressure: Min 0.5 Max. 5 bar;
- Recommend flow pressure: 3 bar;
- Static pressure resistance: Max. 10 bar;
- With static pressure of more than 5 bar, a pressure reducing valve should be installed;
- 6V (4x batteries size AA);
- Flexible connection hoses.

6.0V ⎓ 6 l/m

DIAGRAMA CAUDAL | *FLOW DIAGRAM*

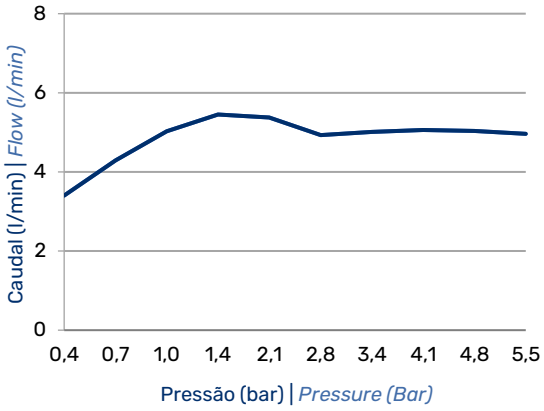

- Perlator M16,5x1 CACHÉ 1,5gpm (5,7 l/min).
- Aerator M16,5x1 CACHÉ 1,5gpm (5,7 l/min).

EFICIÊNCIA HÍDRICA | *WATER LABEL* **A**

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*