Ficha Técnica
Technical sheet

BRUMA

Produto | Product

Sistema termostático embutido de duche com chuveiro de tecto (Chuva/Cascata) e chuveiro mão - VenusQ | *Thermostatic concealed shower set with overhead shower (Rain/Cascade) and handshower set - VenusQ*


187 488 2XX


IMAGEM* | *IMAGE**





DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*





ESPECIFICAÇÕES | *SPECIFICATIONS*

- Sistema termostático embutido de duche com chuveiro de tecto (Chuva/Cascata) e chuveiro mão - VenusQ;
- Cartucho termostático;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Chuveiro de mão - Elo com redutor de caudal 6 l/min;
- Limitador de temperatura a 38°C;
- Com elemento encastrável INT 630 2NO.


- Thermostatic concealed shower set with overhead shower (Rain/Cascade) and handshower set - VenusQ;
- Thermostatic compact cartridge;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- Handshower – Elo with flow reducer 6 l/min;
- Safety stop limits the temperature range to 38 °C;
- With concealed body INT 630 2NO.

DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Saída chuveiro de mão: 6,0 l/min;
- Saída chuveiro de tecto (chuva): 14,5 l/min;
- Saída chuveiro de tecto (cascata): 16,3 l/min.

Flow rate at 3 bar:
- Outlet Handshower: 6,0 l/min;
- Outlet overhead shower (rain): 14,5 l/min;
- Outlet overhead shower (cascade): 16,3 l/min.

EFICIÊNCIA HÍDRICA | *WATER LABEL* **A +**

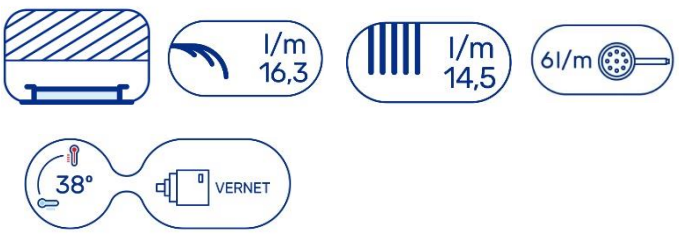

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*

Ficha Técnica
Technical sheet


BRUMA

Product


Elemento encastrável | *Concealed body*

INT 630 2NO

IMAGEM* | *IMAGE**

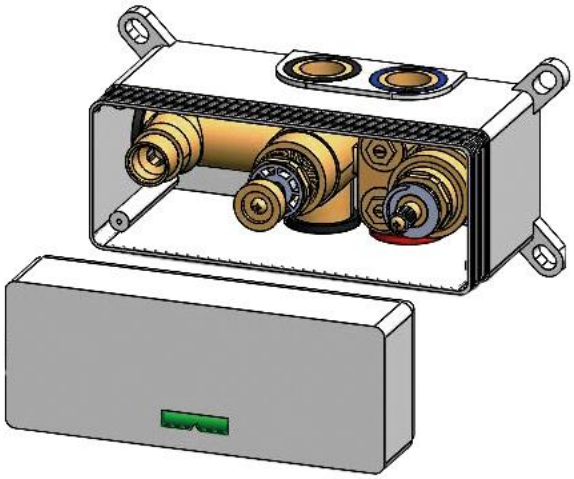

DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

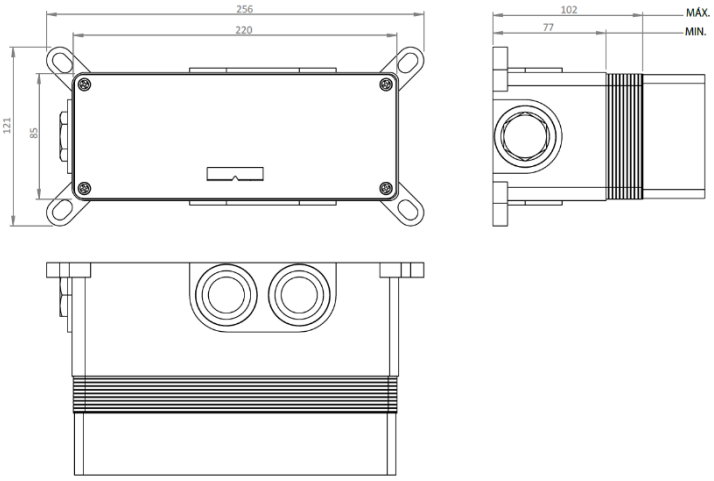

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Elemento encastrável;
- Cartucho termostático com elemento sensível Vernet;
- Cartucho inversor de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- Concealed body;
- Thermostatic cartridge with Vernet sensitive element;
- diverter cartridge with ceramic discs;
- Screws and plugs included.


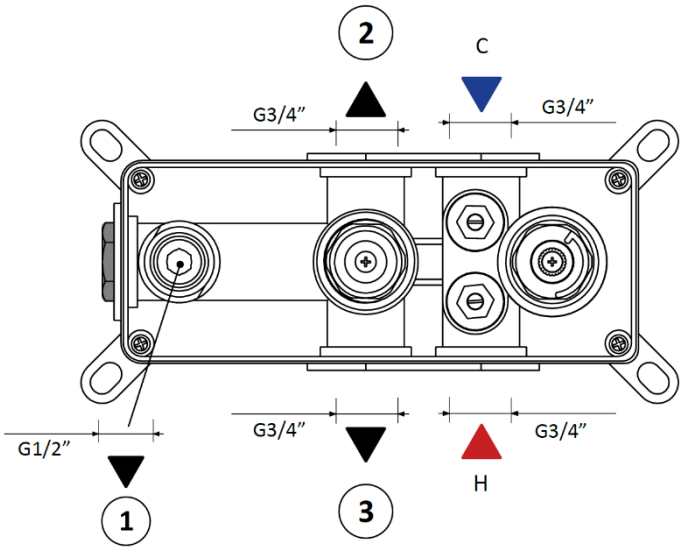


DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Saída 1 (sem restrição): 26,30 l/min
- Saída 2 (sem restrição): 24,70 l/min
- Saída 3 (sem restrição): 24,70 l/min

Flow rate at 3 bar:
- Outlet 1 (without restrictor): 26,30 l/min
- Outlet 2 (without restrictor): 24,70 l/min
- Outlet 3 (without restrictor): 24,70 l/min

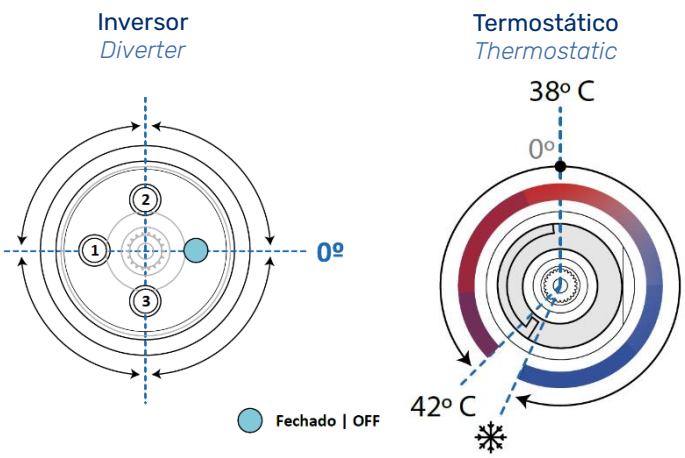

* Imagem não contratual | **Non-contractual image*