Ficha Técnica
Technical sheet

BRUMA

Produto | Product

Sistema embutido de duche com chuveiro de tecto (Chuva/Cascata) e chuveiro mão | *Concealed shower set with overhead shower (Rain/Cascade) and handshower set*


193 426 1XX


IMAGEM* | *IMAGE**





DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*





ESPECIFICAÇÕES | *SPECIFICATIONS*

- Sistema embutido de duche com chuveiro de tecto (Chuva/Cascata) e chuveiro mão;
- Cartucho de discos cerâmicos com cold start BRUMA SmoothBreeze®;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Chuveiro de mão com redutor de caudal 6 l/min;
- Com elemento encastrável 200 240 2NO.

- Concealed shower set with overhead shower (Rain/Cascade) and handshower set;
- BRUMA SmoothBreeze® Ceramic cartridge with cold start;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- Handshower with flow reducer 6 l/min;
- With concealed body 200 240 2NO.



DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudal a 3 bar:
- Chuveiro de mão: 6,0 l/min.
- Chuveiro tecto (chuva): 14,5 l/min.
- Chuveiro tecto (cascata): 16,3 l/min.

Flow rate at 3 bar:
- Handshower: 6,0 l/min.
- Overhead shower (rain): 14,5 l/min.
- Overhead shower (cascade): 16,3 l/min.

EFICIÊNCIA HÍDRICA | *WATER LABEL* **A**

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*

Ficha Técnica
Technical sheet


BRUMA

Product


Elemento encastrável | *Concealed body*

200 240 2NO

IMAGEM* | *IMAGE**

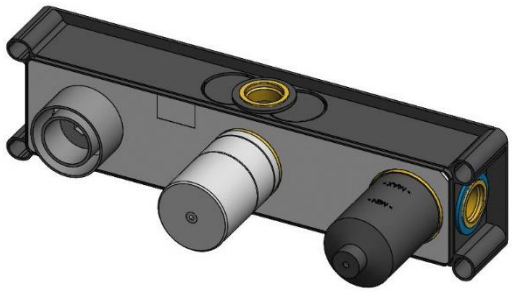

DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

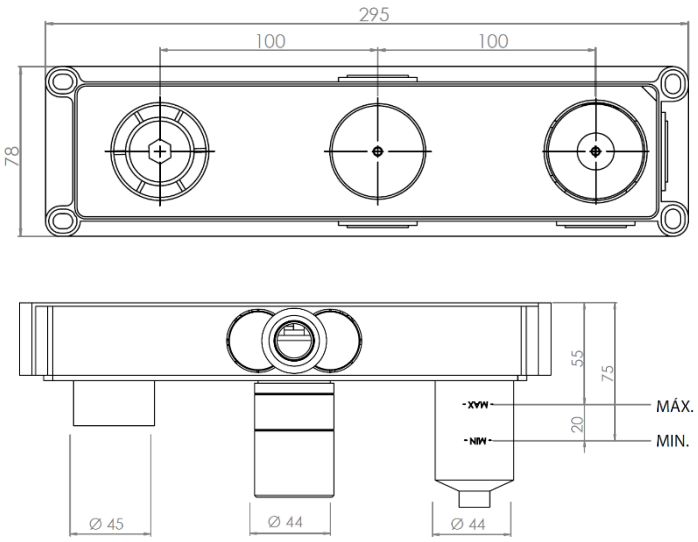

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Elemento encastrável;
- Cartuchos de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- Concealed body;
- Ceramic cartridges;
- Screws and plugs included.


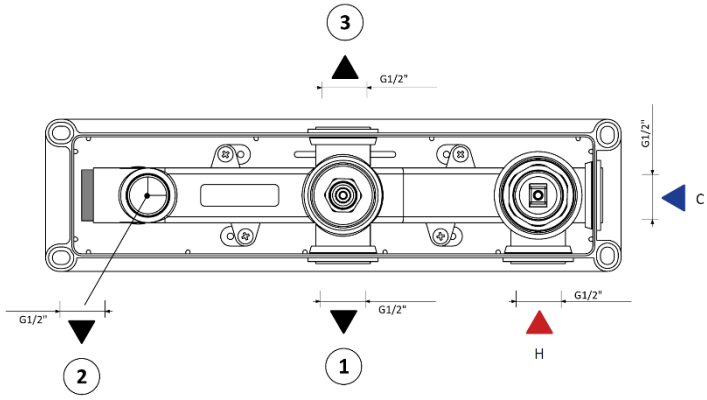


DIAGRAMA CAUDAL | *FLOW DIAGRAM*


Caudal a 3 bar:
- Saída superior (sem restrição): 13,0 l/min.
- Saída lateral (sem restrição): 12,3 l/min.
- Saída inferior (sem restrição): 13,0 l/min.


Flow rate at 3 bar:
- Outlet superior (without restrictor): 13,0 l/min.
- Outlet lateral (without restrictor): 12,3 l/min.
- Outlet inferior (without restrictor): 13,0 l/min.

Inversor
Diverter



Aberto | *Open*





* Imagem não contratual | **Non-contractual image*