Ficha Técnica
Technical sheet

BRUMA

Produto | Product


Sistema de banheira com braço ajustável, chuveiro fixo UltraThin com Ø250 mm em inox e rampa de duche | *Bath-shower system for wall mounting with UltraThin Inox shower head Ø250 mm and shower rail*

194 262 0XX

IMAGEM* | *IMAGE**



DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

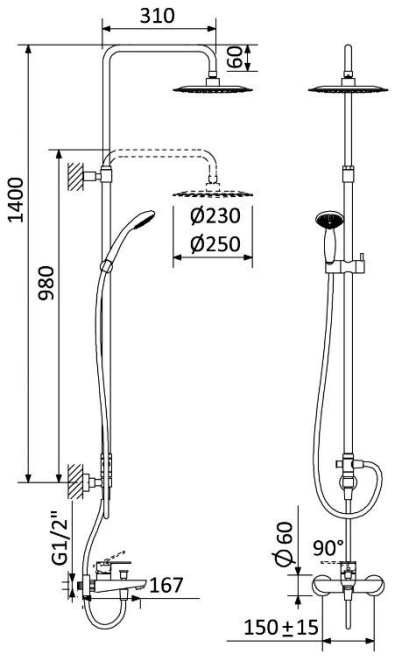

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Sistema de banheira com braço ajustável, chuveiro fixo UltraThin com Ø250 mm em inox e rampa de duche;
- Cartucho de discos cerâmicos com cold start BRUMA SmoothBreeze®;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®.

- Bath-shower system for wall mounting with UltraThin Inox shower head Ø250 mm and shower rail;
- BRUMA SmoothBreeze® Ceramic cartridge with cold start;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®.




DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Chuveiro de mão: 8,0 l/min
- Chuveiro Ø250m: 12,9 l/min.
- Bica de banheira: 11,2 l/min.

Flow rate at 3 bar:
- Handshower: 8,0 l/min
- Head shower Ø250mm: 12,9 l/min.
- Spout: 11,2 l/min

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*