Ficha Técnica
Technical sheet

BRUMA

Produto | Product


Sistema embutido de banheira com Chuveiro fixo de tecto 250x250 mm em inox e braço 100 mm, kit de chuveiro mão Quadra e bica em cascata Flat para banheira | *Concealed bath-shower set with Inox shower head 250x250 mm with ceiling shower arm 100 mm, Quadra handshower set and Flat cascade spout for bathtub*

301 365 2XX

IMAGEM* | *IMAGE**



DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

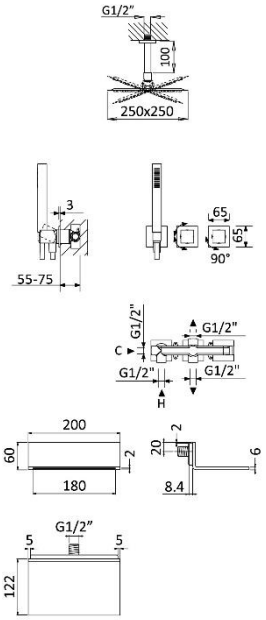

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Sistema embutido de banheira com Chuveiro fixo de tecto 250x250 mm em inox e braço 100 mm em Inox, kit de chuveiro mão Quadra e bica em cascata Flat para banheira;
- Cartucho de discos cerâmicos com cold start BRUMA SmoothBreeze®;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Com elemento encastrável 200 240 2NO.

- Concealed bath-shower set with Inox shower head 250x250 mm with ceiling shower arm 100 mm, Quadra handshower set and Flat cascade spout for bathtub;
- BRUMA SmoothBreeze® Ceramic cartridge with cold start
- Water-saving technology BRUMA AirEcoDrop®
- Anti-limescale system BRUMA ConfortClean®
- With concealed body 200 240 2NO.




DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Chuveiro de mão: 12,3 l/min.
- Chuveiro de parede: 10,0 l/min.
- Bica em cascata Flat: 11,7 l/min.

Flow rate at 3 bar:
- Handshower: 12,3 l/min.
- Shower head: 10,0 l/min.
- Flat cascade spout: 11,7 l/min.

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*

Ficha Técnica
Technical sheet


BRUMA

Product


Elemento encastrável | *Concealed body*

200 240 2NO

IMAGEM* | *IMAGE**

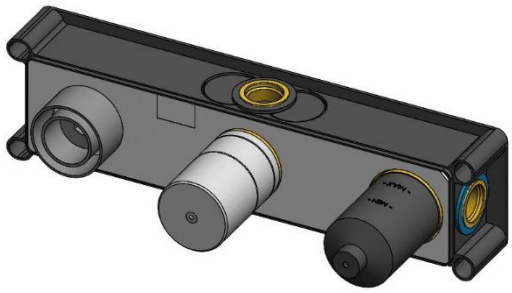

DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

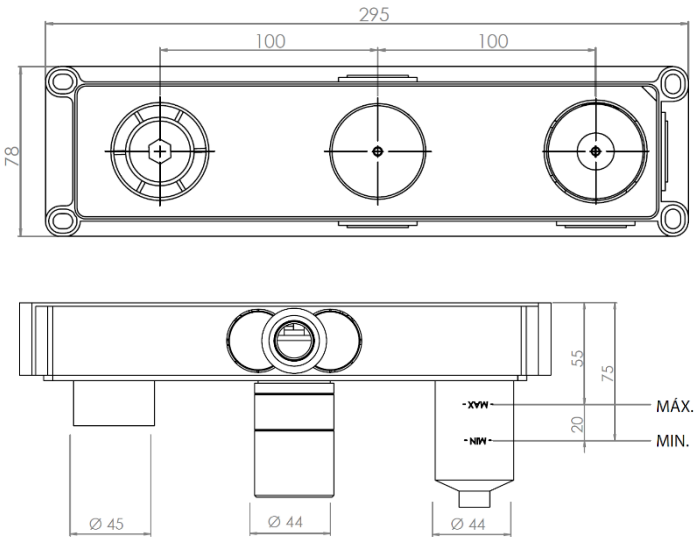

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Elemento encastrável;
- Cartuchos de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- Concealed body;
- Ceramic cartridges;
- Screws and plugs included.


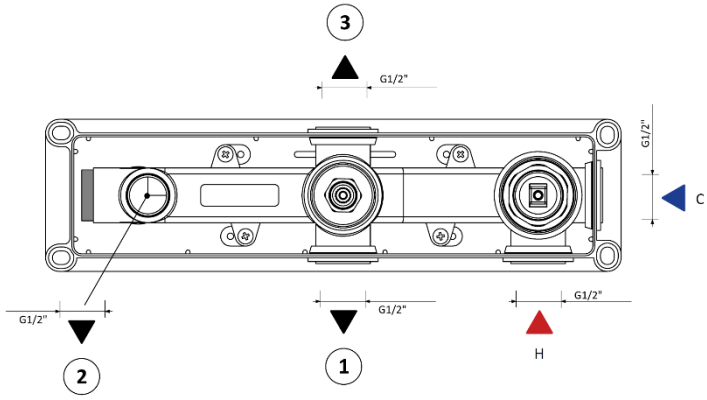


DIAGRAMA CAUDAL | *FLOW DIAGRAM*


Caudal a 3 bar:
- Saída superior (sem restrição): 13,0 l/min.
- Saída lateral (sem restrição): 12,3 l/min.
- Saída inferior (sem restrição): 13,0 l/min.


Flow rate at 3 bar:
- Outlet superior (without restrictor): 13,0 l/min.
- Outlet lateral (without restrictor): 12,3 l/min.
- Outlet inferior (without restrictor): 13,0 l/min.

Inversor
Diverter



Aberto | *Open*





* Imagem não contratual | **Non-contractual image*