

TWO-SPOKE CONTROL HANDWHEEL WITH REVOLVING FOLDING HANDLE

Volantini a razze

Materials:

Reinforced and stabilized polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Central cap:

Grey polyamide (RAL 7035). 13).

Alternative cap colours:

Orange (RAL 2004 code 02).

Blue (RAL 5015 code 07).

Yellow (RAL 1021 code 10).

Red (RAL 3000 code 16).

Green (RAL 6024 code 17).

Black (RAL 9011 code 01).

Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

Lateral insert:

Brass insert with threaded through hole.

(+) Hexagonal black-oxide treated steel insert with threaded through hole. Fixed with black-oxide treated hexagon socket button head screw ISO 7838.

Lateral handle:

Revolving, folding handle art. M136.

Hub:

Solid Hub.

(*) Lightweight hub.

Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue.

Special requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.



Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities spoke handwheels, handles and caps are available in the colours indicated in the chart (reduced range).

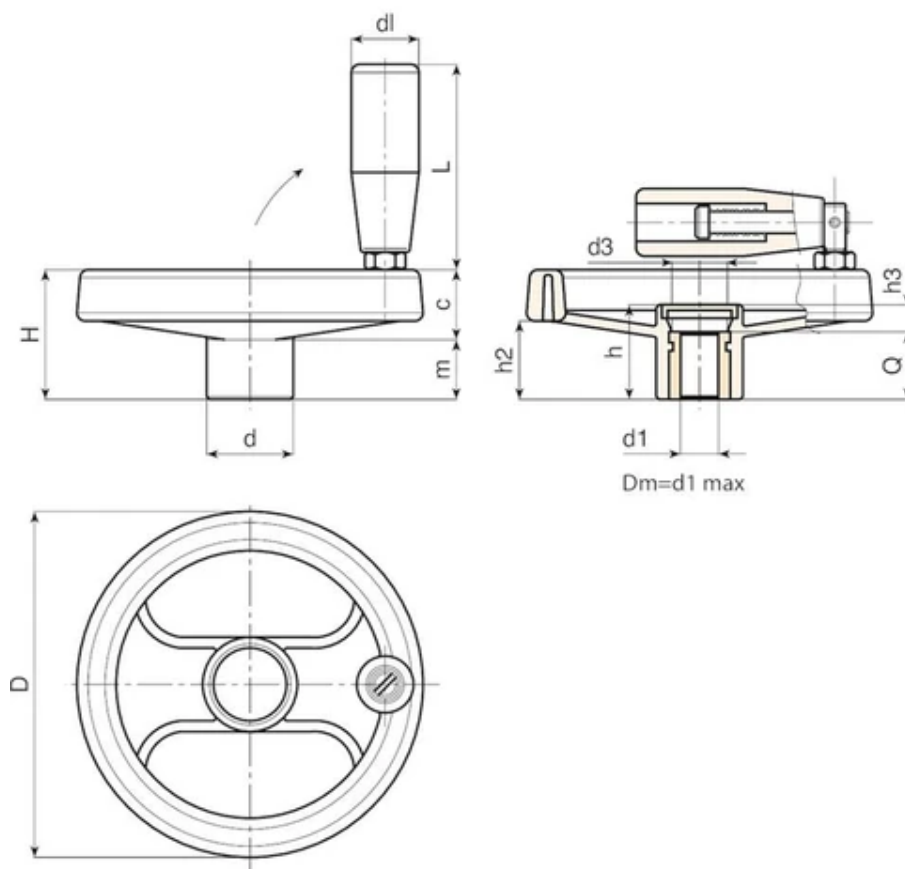

Code	Art.	D	H	h	d	m	c	h2	h3	d3	d1	L	Dm	d1 H10	Q	Weight (g)
D208080.0008	D208080.TP0501P	80	34	26	24.5	15,5	18,5	20	6	16,5	19,5	55	12	5	20	135
D208080.0003	D208080.TD0801P	80	34	26	24.5	15,5	18,5	20	6	16,5	19,5	55	12	8	20	132
D208080.0005	D208080.TD1001P	80	34	26	24.5	15,5	18,5	20	6	16,5	19,5	55	12	10	20	129
D208100.0010	D208100.TP0501P	100	43	33	28,5	20,5	22,5	26,5	9	16,5	19,5	55	16	5	24	192
D208100.0001	D208100.TD0801P	100	43	33	28,5	20,5	22,5	26,5	9	16,5	19,5	55	16	8	24	189
D208100.0003	D208100.TD1001P	100	43	33	28,5	20,5	22,5	26,5	9	16,5	19,5	55	16	10	24	186
D208100.0004	D208100.TD1201P	100	43	33	28,5	20,5	22,5	26,5	9	16,5	19,5	55	16	12	24	183
D208130.0011	D208130.TP0501P	129	50	36	32	21	29	32	12	26	25	76	18	5	24	311
D208130.0002	D208130.TD0801P	129	50	36	32	21	29	32	12	26	25	76	18	8	24	308
D208130.0003	D208130.TD1001P	129	50	36	32	21	29	32	12	26	25	76	18	10	24	305
D208130.0004	D208130.TD1201P	129	50	36	32	21	29	32	12	26	25	76	18	12	24	302
D208160.0001	D208160.TD0801P	159	57	40.5	40	22	35	34	8.5	26	25	76	22	8	32	460
D208160.0006	D208160.TD1401P	159	57	40.5	40	22	35	34	8.5	26	25	76	22	14	32	452
D208160.0010	D208160.TD2001P	159	57	40.5	40	22	35	34	8.5	26	25	76	22	20	32	448
D208200.0001	D208200.TD0801P	198	60,5	38,5	51	16,5	44	31,5	7.5	26	25	76	22	(*) 8	32	704
D208200.0003	D208200.TD1601P	198	60,5	38,5	51	16,5	44	31,5	7.5	26	25	76	22	(*) 16	32	694
D208200.0008	D208200.TD2001P	198	60,5	38,5	51	16,5	44	31,5	7.5	26	25	76	22	(*) 20	32	689

Code	Art.	D	H	h	d	m	c	h2	h3	d3	dl	L	Dm	d1 H10	Q	Weight (g)
D208250.0002	D208250.TD0801P	252	70	48	56	23	47	38,5	12	24	26	97	28	(*) 8	36	1080
D208250.0009	D208250.TD2001P	252	70	48	56	23	47	38,5	12	24	26	97	28	(*) 20	36	1065
D208350.0001	D208350.TD0801P	346	78	49	67.5	21	57	42	17	34	26	97	30	(*)(+) 8	32	1690

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).
Dm = Maximum obtainable diameter for subsequent machining (widening).