

05

## CRANK HANDLE WITH SMOOTH BORE INSERT AND REVOLVING HANDLE M129

Manovelle con foro liscio

### Material:

Reinforced polyamide.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Central cap:

Grey polyamide (RAL 7035). 13).

### Alternative Cap colours:

Orange (RAL 2004 code 02).

Red (RAL 3000 code 16).

Blue (RAL 5015 code 07).

Green (RAL 6024 code 17).

Yellow (RAL 1021 code 10).

Black (RAL 9011 code 01).

### Inserts:

Galvanised steel insert with smooth through bore (tolerance H10).

### Lateral insert:

Brass insert with threaded through hole.

### Lateral handle:

Revolving handle art. M129.


### Special requests:

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials/with different coatings.

Upon request and for special quantities available in the colours indicated in the chart.



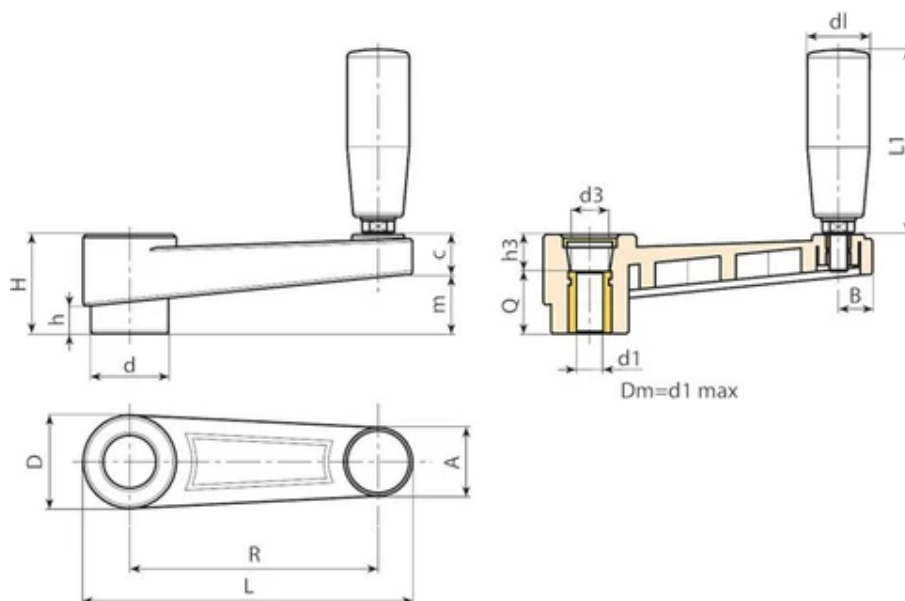

| Code         | Art.           | L   | R   | H    | D    | d    | m    | c    | A  | B   | h    | d3   | h3  | dm | d1 H10 | Q  | dl   |
|--------------|----------------|-----|-----|------|------|------|------|------|----|-----|------|------|-----|----|--------|----|------|
| E222065.0008 | E222065.TP0501 | 89  | 65  | 30   | 27,5 | 22   | 17   | 13   | 20 | 9,5 | 8    | 14,5 | 10  | 12 | 5      | 20 | 20   |
| E222065.0003 | E222065.TD1001 | 89  | 65  | 30   | 27,5 | 22   | 17   | 13   | 20 | 9,5 | 8    | 14,5 | 10  | 12 | 10     | 20 | 20   |
| E222065.0004 | E222065.TD1201 | 89  | 65  | 30   | 27,5 | 22   | 17   | 13   | 20 | 9,5 | 8    | 14,5 | 10  | 12 | 12     | 20 | 20   |
| E222080.0013 | E222080.TP0501 | 107 | 80  | 33,5 | 32   | 26   | 20,5 | 13   | 23 | 11  | 9    | 19,5 | 9,5 | 14 | 5      | 24 | 20   |
| E222080.0003 | E222080.TD1001 | 107 | 80  | 33,5 | 32   | 26   | 20,5 | 13   | 23 | 11  | 9    | 19,5 | 9,5 | 14 | 10     | 24 | 20   |
| E222080.0005 | E222080.TD1201 | 107 | 80  | 33,5 | 32   | 26   | 20,5 | 13   | 23 | 11  | 9    | 19,5 | 9,5 | 14 | 12     | 24 | 20   |
| E222110.0001 | E222110.TD0801 | 140 | 110 | 39   | 35   | 29   | 25   | 14   | 24 | 12  | 11   | 19,5 | 11  | 14 | 8      | 28 | 23,5 |
| E222110.0007 | E222110.TD1001 | 140 | 110 | 39   | 35   | 29   | 25   | 14   | 24 | 12  | 11   | 19,5 | 11  | 14 | 10     | 28 | 23,5 |
| E222110.0004 | E222110.TD1201 | 140 | 110 | 39   | 35   | 29   | 25   | 14   | 24 | 12  | 11   | 19,5 | 11  | 14 | 12     | 28 | 23,5 |
| E222140.0001 | E222140.TD0801 | 175 | 140 | 49   | 44   | 35,5 | 32   | 17   | 27 | 13  | 15,5 | 24   | 19  | 20 | 8      | 30 | 25   |
| E222140.0003 | E222140.TD1201 | 175 | 140 | 49   | 44   | 35,5 | 32   | 17   | 27 | 13  | 15,5 | 24   | 19  | 20 | 12     | 30 | 25   |
| E222140.0004 | E222140.TD1401 | 175 | 140 | 49   | 44   | 35,5 | 32   | 17   | 27 | 13  | 15,5 | 24   | 19  | 20 | 14     | 30 | 25   |
| E222140.0005 | E222140.TD1601 | 175 | 140 | 49   | 44   | 35,5 | 32   | 17   | 27 | 13  | 15,5 | 24   | 19  | 20 | 16     | 30 | 25   |
| E222185.0001 | E222185.TD0801 | 223 | 185 | 55   | 47,5 | 40   | 38,5 | 16,5 | 27 | 14  | 17   | 29,5 | 21  | 22 | 08     | 34 | 26   |
| E222185.0004 | E222185.TD1201 | 223 | 185 | 55   | 47,5 | 40   | 38,5 | 16,5 | 27 | 14  | 17   | 29,5 | 21  | 22 | 12     | 34 | 26   |

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).  
Dm = Maximum obtainable diameter for subsequent machining (widening).

| Code         | Art.           | L1 | Weight (g) |
|--------------|----------------|----|------------|
| E222065.0008 | E222065.TP0501 | 52 | 111        |
| E222065.0003 | E222065.TD1001 | 52 | 117        |

| Code         | Art.           | L1 | Weight (g) |
|--------------|----------------|----|------------|
| E222065.0004 | E222065.TD1201 | 52 | 114        |
| E222080.0013 | E222080.TP0501 | 52 | 135        |
| E222080.0003 | E222080.TD1001 | 52 | 140        |
| E222080.0005 | E222080.TD1201 | 52 | 136        |
| E222110.0001 | E222110.TD0801 | 63 | 182        |
| E222110.0007 | E222110.TD1001 | 63 | 179        |
| E222110.0004 | E222110.TD1201 | 63 | 175        |
| E222140.0001 | E222140.TD0801 | 72 | 271        |
| E222140.0003 | E222140.TD1201 | 72 | 265        |
| E222140.0004 | E222140.TD1401 | 72 | 261        |
| E222140.0005 | E222140.TD1601 | 72 | 255        |
| E222185.0001 | E222185.TD0801 | 82 | 450        |
| E222185.0004 | E222185.TD1201 | 82 | 442        |

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).  
Dm = Maximum obtainable diameter for subsequent machining (widening).