

# F177



06

## 6-LOBE SOLID HANDWHEEL WITH THREADED THROUGH-HOLE INSERT

Volantini a 6 lobi

### Materials:

Reinforced polyamide.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

Version F177:

Brass insert with threaded through hole (thread tolerance 6H).

Version F177PIN:


Stainless steel insert with threaded through hole (Aisi 303) (thread tolerance 6H).

### Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart (attention: reduced range).



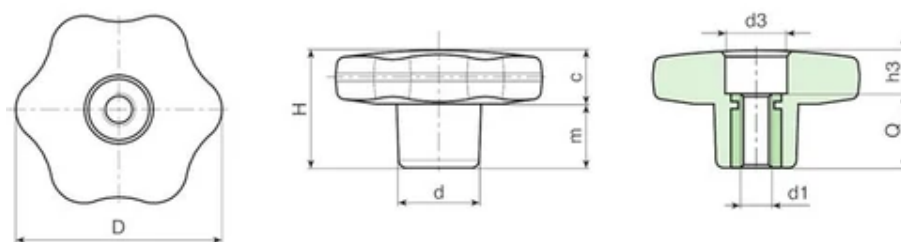

**Version F177: with brass insert.**

| Code        | Art.          | D  | H    | d  | c  | m    | d3 | h3 | d1 6H | Q  | Weight (g) |
|-------------|---------------|----|------|----|----|------|----|----|-------|----|------------|
| F17730.0001 | F17730.TM0501 | 30 | 22   | 15 | 11 | 11   | 11 | 4  | M5    | 18 | 12         |
| F17730.0005 | F17730.TM0601 | 30 | 22   | 15 | 11 | 11   | 11 | 4  | M6    | 18 | 13         |
| F17730.0011 | F17730.TM0801 | 30 | 22   | 15 | 11 | 11   | 11 | 4  | M8    | 18 | 13         |
| F17730.0014 | F17730.TM1001 | 30 | 22   | 15 | 11 | 11   | 11 | 4  | M10   | 18 | 14         |
| F17740.0001 | F17740.TM0601 | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M6    | 18 | 20         |
| F17740.0008 | F17740.TM0801 | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M8    | 18 | 21         |
| F17740.0014 | F17740.TM1001 | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M10   | 18 | 22         |
| F17750.0002 | F17750.TM0601 | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M6    | 18 | 33         |
| F17750.0005 | F17750.TM0801 | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M8    | 18 | 34         |
| F17750.0010 | F17750.TM1001 | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M10   | 18 | 35         |
| F17750.0016 | F17750.TM1201 | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M12   | 18 | 35         |
| F17760.0002 | F17760.TM0801 | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M8    | 18 | 54         |
| F17760.0006 | F17760.TM1001 | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M10   | 18 | 55         |
| F17760.0010 | F17760.TM1201 | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M12   | 18 | 55         |
| F17760.0015 | F17760.TM1401 | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M14   | 18 | 56         |

**Version F177CIN: with stainless steel insert (Aisi 303).**

| Code        | Art.             | D  | H  | d  | c  | m  | d3 | h3 | d1 6H | Q  | Weight (g) |
|-------------|------------------|----|----|----|----|----|----|----|-------|----|------------|
| F17730.0003 | F17730.TM0501PIN | 30 | 22 | 15 | 11 | 11 | 11 | 4  | M5    | 18 | 12         |
| F17730.0007 | F17730.TM0601PIN | 30 | 22 | 15 | 11 | 11 | 11 | 4  | M6    | 18 | 13         |

| Code        | Art.             | D  | H    | d  | c  | m    | d3 | h3 | d1 6H | Q  | Weight (g) |
|-------------|------------------|----|------|----|----|------|----|----|-------|----|------------|
| F17730.0012 | F17730.TM0801PIN | 30 | 22   | 15 | 11 | 11   | 11 | 4  | M8    | 18 | 13         |
| F17740.0003 | F17740.TM0601PIN | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M6    | 18 | 20         |
| F17740.0010 | F17740.TM0801PIN | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M8    | 18 | 21         |
| F17740.0015 | F17740.TM1001PIN | 40 | 24.5 | 17 | 12 | 12.5 | 12 | 6  | M10   | 18 | 22         |
| F17750.0008 | F17750.TM0801PIN | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M8    | 18 | 34         |
| F17750.0012 | F17750.TM1001PIN | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M10   | 18 | 35         |
| F17750.0017 | F17750.TM1201PIN | 50 | 29   | 20 | 14 | 15   | 14 | 11 | M12   | 18 | 35         |
| F17760.0004 | F17760.TM0801PIN | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M8    | 18 | 54         |
| F17760.0008 | F17760.TM1001PIN | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M10   | 18 | 55         |
| F17760.0012 | F17760.TM1201PIN | 60 | 34   | 24 | 16 | 18   | 15 | 16 | M12   | 18 | 55         |