

H753

+135°
-30°

PA6
+G.F.

RoHS
COMPLIANT

08

08 0000 00 / 00 0000

Knurled handwheels with stud

08:
00 000000
000 00000 00

00 00:
0000 (000 00 00000).


00:
00 (RAL 9011).

000:
00 00 00 000 000 (000 00 6g).

00 00 00:
00 0, 000 00 000 00, 000 000 0000 000 00 0 0000
00 0 00 00 000 00, 0000 000 000 00 0 0000
00 0 0 00 00 00 0 000 000 000 00 0 00000



© Copyright
Bateco srl Unipersonale

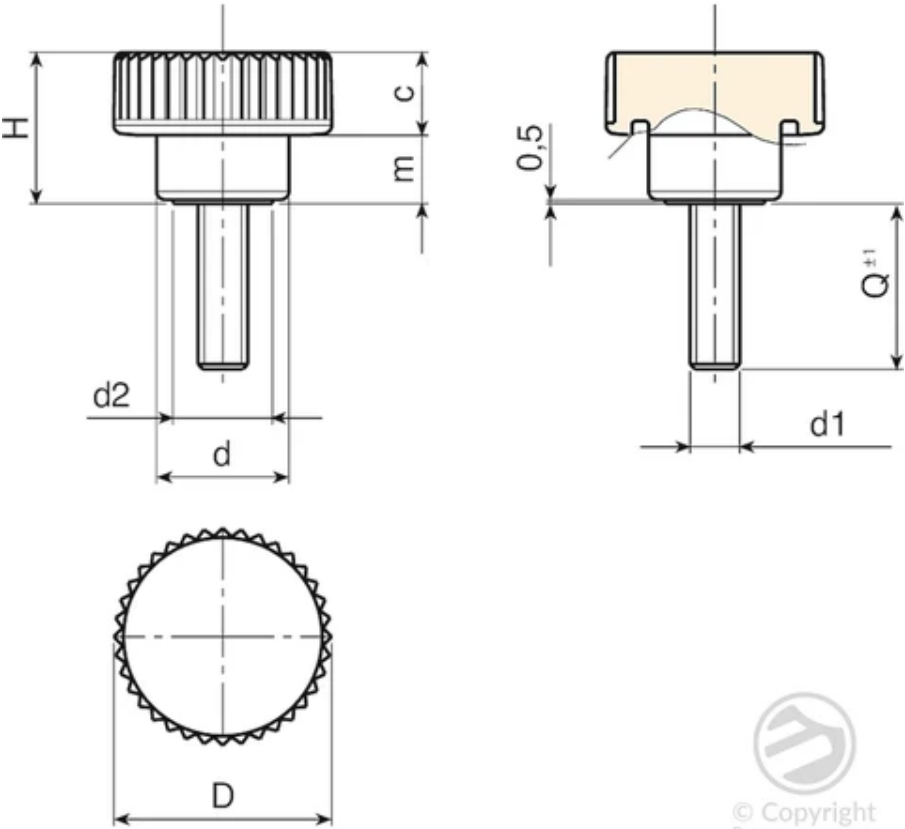

© Copyright
Bateco srl Unipersonale

08	art.	D	H	d	m	c	d2	LM	d1 6g	Q	08(g)
H75326.0004	H75326.TM05X2001	26	18	16	8.5	9.5	12	50	M5	20	10
H75326.0008	H75326.TM06X2001	26	18	16	8.5	9.5	12	50	M6	20	13

??	art.	D	H	d	m	c	d2	LM	d16g	Q	??(g)
H75326.0009	H75326.TM06X2501	26	18	16	8.5	9.5	12	50	M6	25	14
H75326.0012	H75326.TM08X2001	26	18	16	8.5	9.5	12	50	M8	20	20
H75326.0014	H75326.TM08X3001	26	18	16	8.5	9.5	12	50	M8	30	22

LM = 22 222 22
25022 222, 22 22 22 22