

H759

+135°
-30°

PA6
+G.F.

RoHS
COMPLIANT

08

08 / 08, 08 0808

Knurled handwheels with stud

08:
08 080808
0808 0808 08

08 08:
0808 (0808 08 080808).



08:
08 (RAL 9011).

0808:
08 08 08 0808 0808 (0808 08 6g).

08 08 0808:
08 08, 0808 08 0808 08, 0808 0808 0808 0808 08 080808
08 08 0808 0808 08, 080808 0808 0808 0808 08 080808
08 08 08 0808 0808 0808 0808 0808 0808 080808



© Copyright
Boteco srl Unipersonale

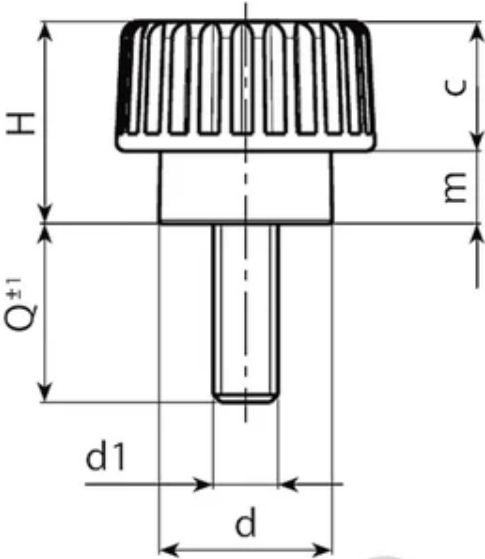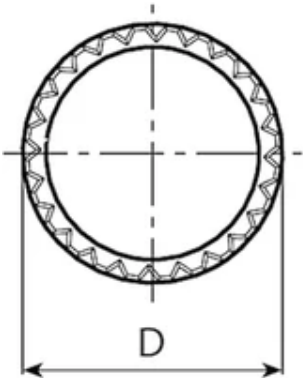

© Copyright
Boteco srl Unipersonale

08	art.	D	H	d	m	c	LM	d1 6g	Q	08(g)
H75915.0002	H75915.TM03X1101	15	11,5	10,5	4	7,5	70	M3	11	3
H75915.0004	H75915.TM03X2401	15	11,5	10,5	4	7,5	70	M3	24	3,5

??	art.	D	H	d	m	c	LM	d16g	Q	??(g)
H75915.0005	H75915.TM04X1001	15	11,5	10,5	4	7,5	70	M4	10	3,5
H75915.0009	H75915.TM04X2001	15	11,5	10,5	4	7,5	70	M4	20	4
H75915.0014	H75915.TM04X3001	15	11,5	10,5	4	7,5	70	M4	30	4,5
H75915.0020	H75915.TM05X1001	15	11,5	10,5	4	7,5	70	M5	10	4
H75915.0024	H75915.TM05X1601	15	11,5	10,5	4	7,5	70	M5	16	4,5
H75915.0025	H75915.TM05X2001	15	11,5	10,5	4	7,5	70	M5	20	5,5
H75915.0026	H75915.TM05X3001	15	11,5	10,5	4	7,5	70	M5	30	6,5
H75915.0028	H75915.TM06X1001	15	11,5	10,5	4	7,5	70	M6	10	5
H75915.0030	H75915.TM06X1601	15	11,5	10,5	4	7,5	70	M6	16	6
H75915.0032	H75915.TM06X2001	15	11,5	10,5	4	7,5	70	M6	20	7,5

LM = 22 222 22
2502 22 222, 22 22 22 22