

10

UNIVERSAL LOCK FOR 7 MM SQUARE INSERT KEY

Serrature 1/4 giro M19

Materials:

- (1) Die-cast zamak lock body M19 (stator) and rotor. 7 mm square insert key.
- (2) Elastic washer d. 24x1 with bore d. 19.4.
- (3) Steel hexagon lock nut M19x1.
- (4) Steel locking lever. (Qn design N flat - Qe design E bent outwards).
- (5) Conical steel elastic washer d. 12x1.5.
- (6) Steel Phillips dome head screw M5x8.



Surface finish:

- (1) Nickel-plated.
- (2-5) Black oxide treated.
- (3-4-6) Standard blue galvanising.

Key (optional):

- (7) Red plastic key. Art. J09050.TQ0816.

ATTENTION: The key is not supplied. To be ordered separately.


Rotation:

90°.

Special Requests:

None.



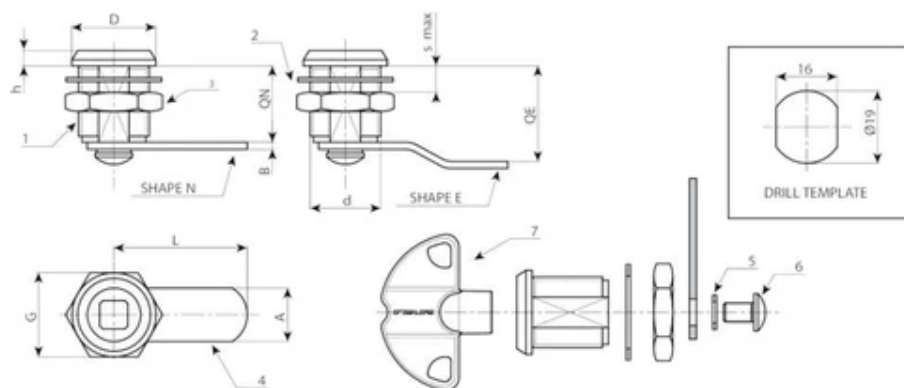

New product version

Code	Art.	A	d	D	L	Q	E	F	G	Ht	H	s (max.)	s1	Weight (g)	Key
J14419.0001	J14419.Z07E00X38L	7	M19	22	38	20	0	16	22	31	4	6	2,5	-	J09050.TQ0816
J14419.0002	J14419.Z07E02X38L	7	M19	22	38	20	2	16	22	31	4	6	2,5	-	J09050.TQ0816
J14419.0003	J14419.Z07E05X35L	7	M19	22	35	20	5	16	22	31	4	6	2,5	-	J09050.TQ0816
J14419.0004	J14419.Z07E09X35L	7	M19	22	35	20	9	16	22	31	4	6	2,5	-	J09050.TQ0816