

15

FLAT HINGE WITH THROUGH HOLE AND THREADED HOLE INSERT

Cerniere in plastica con fori passanti

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Brass insert with female threaded hole (thread tolerance 6H).

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:


Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.



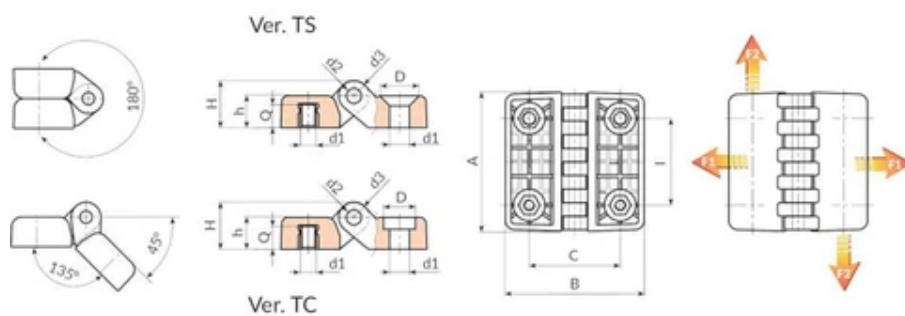

Version O433-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43330.0002	O43330.TM0601TS	30	30	48	48	10,5	15,5	12,5	5	10	M6 / 6,5	7	31	2000	1450
O43340.0002	O43340.TM0601TS	40	40	64	64	13	19	12,5	5	12	M6 / 6,5	8,5	60	3500	1650

Version O433-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	Q	Weight (g)	F1 (N)	F2 (N)
O43330.0001	O43330.TM0601TC	30	30	48	48	10,5	15,5	10,5	5	10	M6 / 6,5	7	31	2000	1450
O43340.0001	O43340.TM0601TC	40	40	64	64	13	19	10,5	5	12	M6 / 6,5	8,5	60	3500	1650