

15

HINGE WITH ADJUSTABLE FRICTION AND THROUGH HOLE

Cerniere con frizione/blocco

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(4) Galvanised steel pin.

(1) Stainless steel friction adjusting screw (Aisi 304).

(2) Stainless steel nut for adjusting screw (Aisi 304).

(3) Pivot pin cap in PA6.

Hole:

Through hole obtained by moulding the plastic for fixing screw
(O460032=M04 O460047=M06).

Adjusting the friction device:

Using a screw driver to turn the adjusting screw (1), the friction can be set to a maximum of:


O460032: 0.8 Nm.

O460047: 4 Nm.

Special Requests:

None.



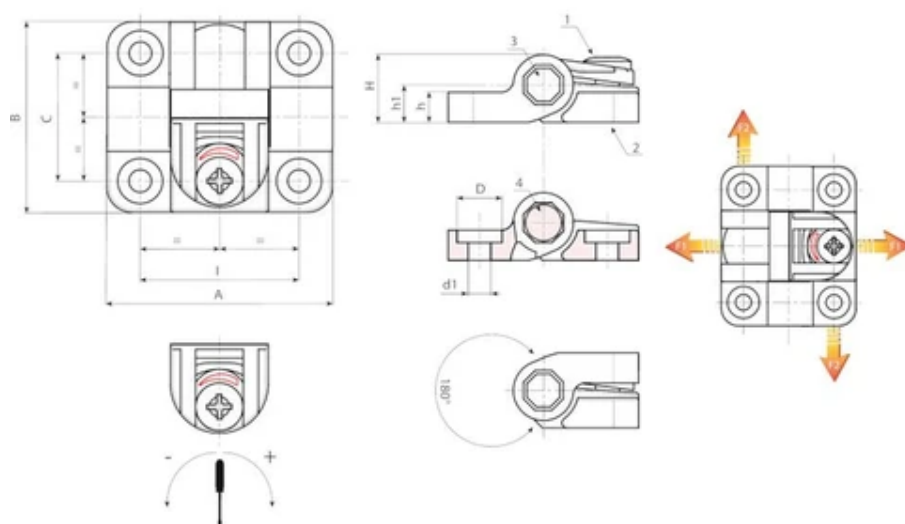

Code	art.	I	C	A	B	H	h	h1	D	d1	Weight (g)	F1 (N)	F2 (N)
O460032.0001	O460032.TG04.501	32	25,5	45	38	13,5	6	7,5	9	4,5 (M4)	17	700	1400
O460047.0001	O460047.TG06.501	47,5	38	63,5	58	20,5	8,5	11,5	12,5	6,5 (M6)	47	1500	2250