

15

REMOVABLE FLAT ZAMAK HINGE WITH THREADED STUD

Cerniere in zama

Materials:

(1) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Smooth.

Colour:

(01) Black epoxy powder coated (RAL 9011).

(Z) Standard blue galvanising.

Inserts:

(2) Galvanised steel threaded stud (thread tolerance 6g).

(3) Stainless steel hinge pivot pin (Aisi 304).

(4) Stainless steel separating washer (Aisi 304) inserted between the two knuckles.


Assembly:

The hinge can be supplied for mounting doors that swing open to the right (DX/RH – enter the letter D at the end of the code); or for doors that swing open to the left (SX/LH – enter the letter S at the end of the code).

Special Requests:

None.



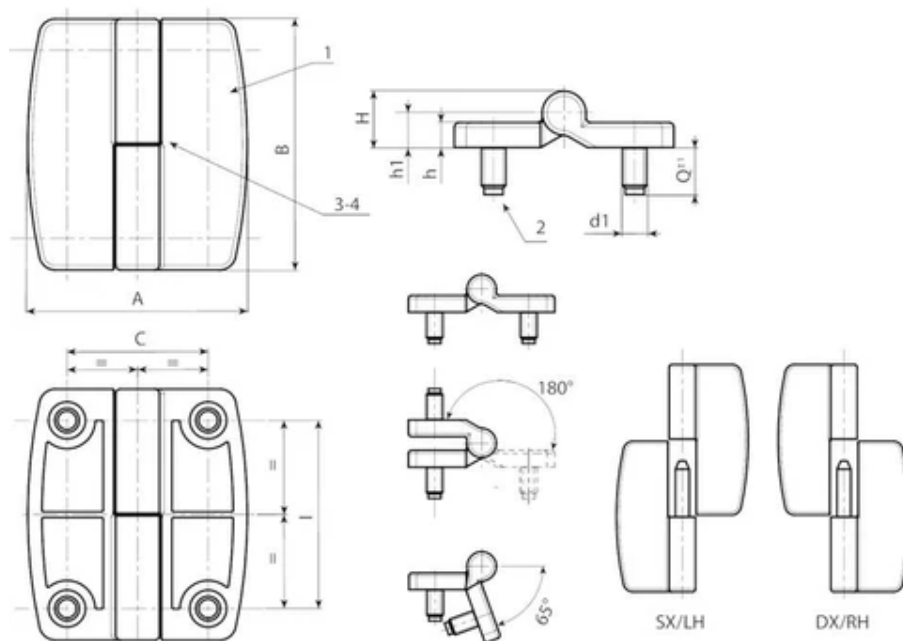

Black coated version code 01, final letter S at the end for Left version – final letter D for door opening to the right.

Code	Art.	C	I	A	B	h	H	h1	d1 6g	Q	Weight (g)
O500045.0001	O500045.ZM08X1401D	45	60	70	80	8	18	11	M8	15	281
O500045.0002	O500045.ZM08X1401S	45	60	70	80	8	18	11	M8	15	281

Galvanised version code Z, final letter S at the end for Left version – final letter D for door opening to the right.

Code	Art.	C	I	A	B	h	H	h1	d1 6g	Q	Weight (g)
O500045.0003	O500045.ZM08X14ZD	45	60	70	80	8	18	11	M8	15	281
O500045.0004	O500045.ZM08X14ZS	45	60	70	80	8	18	11	M8	15	281