

16

KNURLED MOUNTING FOOT WITH FIXED THREADED STUD

Piedi con prigioniero fisso


**Materials:**  
High density polyethylene.

**Surface finish:**  
Satin.

**Colour:**  
Black (RAL 9011).

**Inserts:**  
Galvanised steel threaded stud (thread tolerance 6g).

**Special requests:**  
Upon request and for special quantities inserts can be supplied with customised lengths (minimum quantity 10,000).

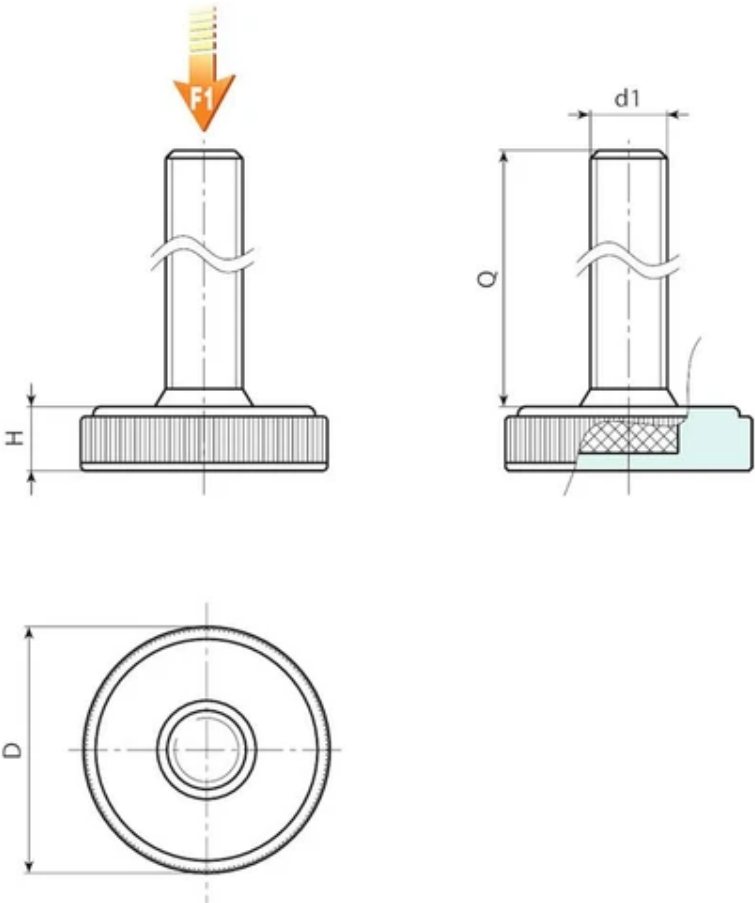

| Code        | Art.             | D  | H | d1 6g | Q  | Weight (g) | F1 (N) |
|-------------|------------------|----|---|-------|----|------------|--------|
| P20025.0001 | P20025.TM06X1701 | 25 | 6 | M6    | 17 | 7          | 1000   |
| P20025.0002 | P20025.TM08X2501 | 25 | 6 | M8    | 25 | 14         | 1000   |
| P20025.0003 | P20025.TM10X3501 | 25 | 6 | M10   | 35 | 25         | 1000   |

| Code        | Art.             | D  | H    | d1 6g | Q  | Weight (g) | F1 (N) |
|-------------|------------------|----|------|-------|----|------------|--------|
| P20035.0001 | P20035.TM08X2501 | 35 | 8    | M8    | 25 | 18         | 1000   |
| P20035.0002 | P20035.TM10X2501 | 35 | 8    | M10   | 25 | 25         | 1000   |
| P20035.0005 | P20035.TM10X4001 | 35 | 8    | M10   | 40 | 32         | 1000   |
| P20040.0001 | P20040.TM10X3501 | 40 | 9    | M10   | 35 | 35         | 1000   |
| P20050.0001 | P20050.TM10X3501 | 50 | 10   | M10   | 35 | 40         | 1000   |
| P20060.0001 | P20060.TM10X3501 | 60 | 10.5 | M10   | 35 | 50         | 1000   |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.