

16

CONICAL ANTI-VIBRATION MOUNT WITH THREADED STUD

Antivibranti

Materials:

Natural rubber (NR),

Rubber hardness:

Hardness 55 Shore A (tolerance $\pm 5\%$).

Surface finish:

Smooth.

Colour:

Black (RAL 9011).

Inserts:

(1) Galvanised boron steel threaded stud (thread tolerance 6g).

(2) Galvanised weldable steel washer.

Special requests:

Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied with hardness 45 or 70 Shore A.


Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied in different materials:

P326= SBR

P327= NBR

P328= EPDM



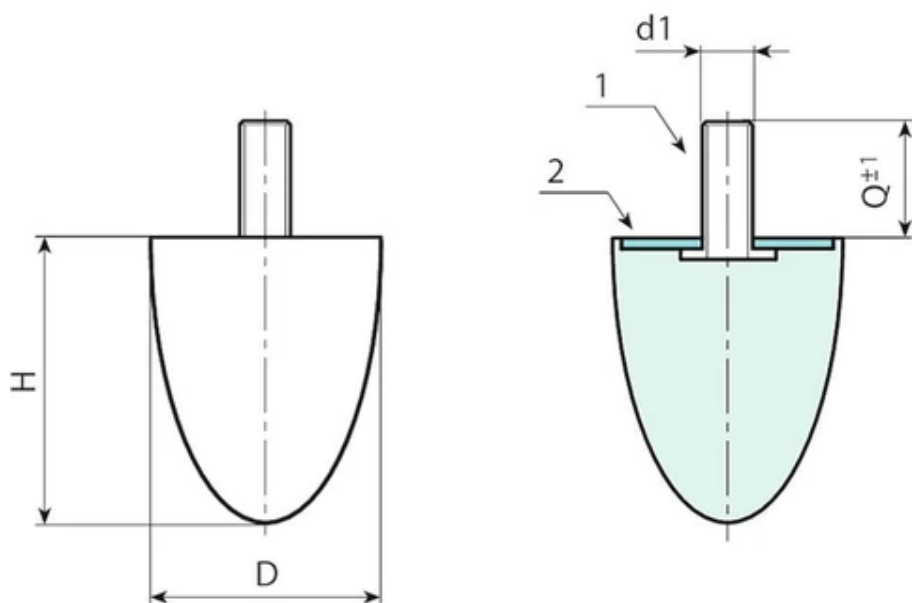

Code	Art.	D	H	d1 6g	Q	Weight (g)
P325020.0001	P325020.F24M06X1855	20	24	M6	18	10
P325025.0001	P325025.F25M06X1855	25	25	M8	18	12
P325030.0001	P325030.F36M08X2055	30	36	M8	20	35
P325035.0001	P325035.F40M08X2355	35	40	M8	23	47
P325050.0001	P325050.F60M10X2855	50	60	M10	28	117
P325050.0003	P325050.F67M10X2855	50	67	M10	28	125