

16

FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE A - BALL 12.5

Piedi metallo con stelo snodato

Materials:

P530:

Turned free-cutting steel mounting foot base.

P530CIN:

Turned stainless steel mounting foot base (Aisi 303).

Surface finish:

Smooth.

Colour:

P530:

Standard blue galvanising.

P530CIN:

Natural.

Inserts:

P530:

Galvanised steel threaded and articulated stem (ball 12.5) with hexagonal base (thread tolerance 6g).

P530CIN:

Stainless steel threaded and articulated stem (ball 12.5) with hexagonal base (Aisi 303) (thread tolerance 6g).


Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.



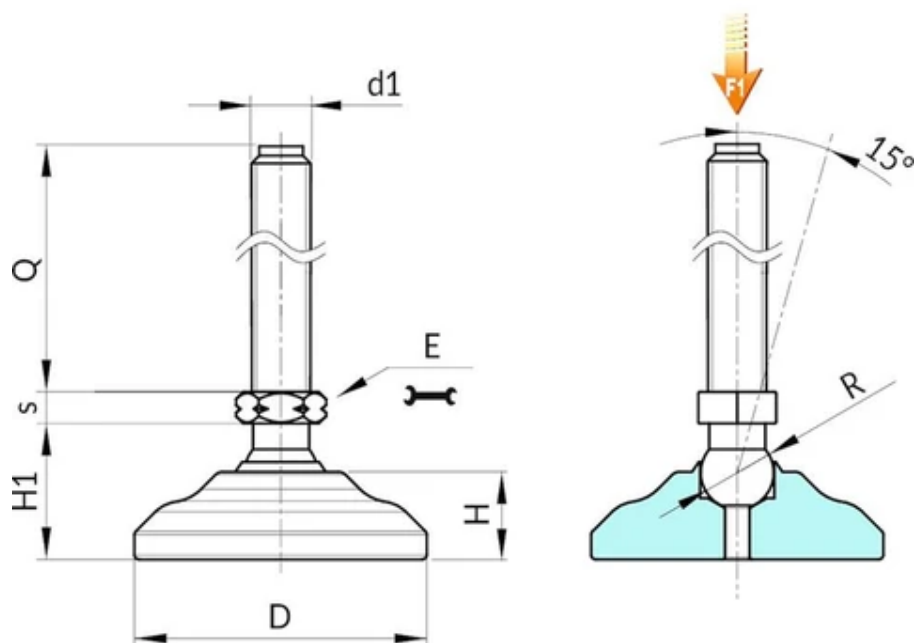

Version P530: Galvanised steel mounting foot with stem type A (with hexagonal base) and ball 12.5

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P53040.0009	P53040.VZM08X45	40	11,5	20	13	5	15	M8	45	132	50
P53040.0010	P53040.VZM08X70	40	11,5	20	13	5	15	M8	70	139	50
P53040.0011	P53040.VZM10X045	40	11,5	20	13	5	12.5	M10	45	140	23
P53040.0012	P53040.VZM10X070	40	11,5	20	13	5	12.5	M10	70	152	23
P53040.0013	P53040.VZM10X100	40	11,5	20	13	5	12.5	M10	100	179	23
P53040.0014	P53040.VZM12X045	40	11,5	20	13	5	12.5	M12	45	149	23
P53040.0015	P53040.VZM12X070	40	11,5	20	13	5	12.5	M12	70	168	23
P53040.0016	P53040.VZM12X100	40	11,5	20	13	5	12.5	M12	100	188	23
P53050.0009	P53050.VZM08X045	60	18	28	13	5	12.5	M8	45	295	13
P53050.0010	P53050.VZM08X070	60	18	28	13	5	12.5	M8	70	302	13
P53050.0011	P53050.VZM10X045	50	13.5	23	13	5	12.5	M10	45	203	23
P53050.0012	P53050.VZM10X070	50	13.5	23	13	5	12.5	M10	70	215	23
P53050.0013	P53050.VZM10X100	50	13.5	23	13	5	12.5	M10	100	240	23
P53050.0014	P53050.VZM12X045	50	13.5	23	13	5	12.5	M12	45	212	23
P53050.0015	P53050.VZM12X070	50	13.5	23	13	5	12.5	M12	70	231	23
P53050.0016	P53050.VZM12X100	50	13.5	23	13	5	12.5	M12	100	251	23
P53060.0009	P53060.VZM08X045	60	18	28	13	5	12.5	M8	45	295	13
P53060.0010	P53060.VZM08X070	60	18	28	13	5	12.5	M8	70	302	13
P53060.0011	P53060.VZM10X045	60	18	28	13	5	12.5	M10	45	303	23
P53060.0012	P53060.VZM10X070	60	18	28	13	5	12.5	M10	70	315	23
P53060.0013	P53060.VZM10X100	60	18	28	13	5	12.5	M10	100	340	23

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P53060.0014	P53060.VZM12X045	60	18	28	13	5	12.5	M12	45	312	23
P53060.0015	P53060.VZM12X070	60	18	28	13	5	12.5	M12	70	331	23
P53060.0016	P53060.VZM12X100	60	18	28	13	5	12.5	M12	100	351	23

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Version P530CIN: Stainless steel mounting foot with stem type A (with hexagonal base) and ball 12.5

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P53040.0001	P53040.INM08X045CIN	40	11,5	20	13	5	12.5	M8	45	132	13
P53040.0002	P53040.INM08X070CIN	40	11,5	20	13	5	12.5	M8	70	139	13
P53040.0003	P53040.INM10X045CIN	40	11,5	20	13	5	12.5	M10	45	140	23
P53040.0005	P53040.INM10X70CIN	40	11,5	20	13	5	12.5	M10	70	152	23
P53040.0004	P53040.INM10X100CIN	40	11,5	20	13	5	12.5	M10	100	179	23
P53040.0006	P53040.INM12X045CIN	40	11,5	20	13	5	12.5	M12	45	149	23
P53040.0007	P53040.INM12X070CIN	40	11,5	20	13	5	12.5	M12	70	168	23
P53040.0008	P53040.INM12X100CIN	40	11,5	20	13	5	12.5	M12	100	188	23
P53050.0001	P53050.INM08X045CIN	50	13.5	23	13	5	12.5	M8	45	195	13
P53050.0002	P53050.INM08X070CIN	50	13.5	23	13	5	12.5	M8	70	202	13
P53050.0003	P53050.INM10X045CIN	50	13.5	23	13	5	12.5	M10	45	203	23
P53050.0004	P53050.INM10X070CIN	50	13.5	23	13	5	12.5	M10	70	215	23
P53050.0005	P53050.INM10X100CIN	50	13.5	23	13	5	12.5	M10	100	240	23
P53050.0006	P53050.INM12X045CIN	50	13.5	23	13	5	12.5	M12	45	212	23
P53050.0007	P53050.INM12X070CIN	50	13.5	23	13	5	12.5	M12	70	231	23
P53050.0008	P53050.INM12X100CIN	50	13.5	23	13	5	12.5	M12	100	251	23
P53060.0001	P53060.INM08X045CIN	60	18	28	13	5	12.5	M8	45	295	13
P53060.0002	P53060.INM08X070CIN	60	18	28	13	5	12.5	M8	70	302	13
P53060.0003	P53060.INM10X045CIN	60	18	28	13	5	12.5	M10	45	303	23
P53060.0004	P53060.INM10X070CIN	60	18	28	13	5	12.5	M10	70	315	23
P53060.0005	P53060.INM10X100CIN	60	18	28	13	5	12.5	M10	100	340	23
P53060.0006	P53060.INM12X045CIN	60	18	28	13	5	12.5	M12	45	312	23
P53060.0007	P53060.INM12X070CIN	60	18	28	13	5	12.5	M12	70	331	23
P53060.0008	P53060.INM12X100CIN	60	18	28	13	5	12.5	M12	100	351	23

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.