

# P534



AVP

Aisi  
303

RoHS  
COMPLIANT

16

## FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE A - BALL 24

Piedi metallo con stelo snodato

### Materials:

P534:

Turned free-cutting steel mounting foot base.

P534CIN:

Turned stainless steel mounting foot base (Aisi 303).

### Surface finish:

Smooth.

### Colour:

P534:

Standard blue galvanising.

P534CIN:

Natural.

### Inserts:

P534:

Galvanised steel threaded and articulated stem (ball 24) with hexagonal base (thread tolerance 6g).

P534CIN:

Stainless steel threaded and articulated stem (ball 24) with hexagonal base (Aisi 303) (thread tolerance 6g).


### Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

### Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.



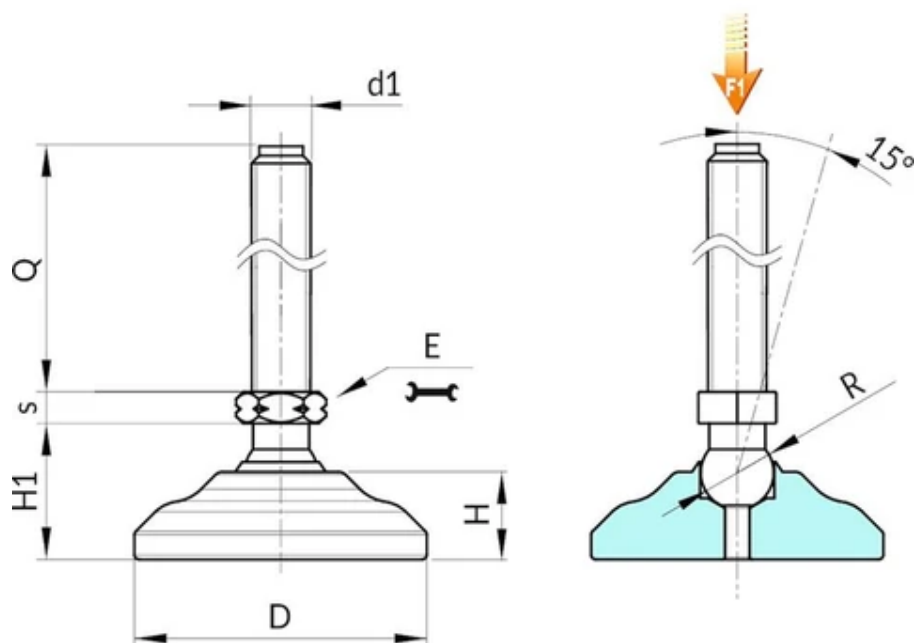

**Version P534: Galvanised steel mounting foot with stem type A (with hexagonal base) and ball 24**

| Code        | Art.             | D  | H  | H1 | E  | s | R  | d1 6g | Q   | Weight (g) | F1 (kN) |
|-------------|------------------|----|----|----|----|---|----|-------|-----|------------|---------|
| P53460.0012 | P53460.VZM16X90  | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 90  | -          | 60      |
| P53460.0013 | P53460.VZM16X110 | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 110 | -          | 60      |
| P53460.0014 | P53460.VZM16X130 | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 130 | -          | 60      |
| P53460.0015 | P53460.VZM16X150 | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 150 | -          | 60      |
| P53460.0016 | P53460.VZM16X170 | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 170 | -          | 60      |
| P53460.0017 | P53460.VZM20X90  | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 90  | -          | 90      |
| P53460.0018 | P53460.VZM20X110 | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 110 | -          | 90      |
| P53460.0019 | P53460.VZM20X130 | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 130 | -          | 90      |
| P53460.0020 | P53460.VZM20X150 | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 150 | -          | 90      |
| P53460.0021 | P53460.VZM20X170 | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 170 | -          | 90      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

**Version P534CIN: Stainless steel mounting foot with stem type A (with hexagonal base) and ball 24**

| Code        | Art.                | D  | H  | H1 | E  | s | R  | d1 6g | Q   | Weight (g) | F1 (kN) |
|-------------|---------------------|----|----|----|----|---|----|-------|-----|------------|---------|
| P53460.0001 | P53460.INM16X90CIN  | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 90  | -          | 60      |
| P53460.0002 | P53460.INM16X110CIN | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 110 | -          | 60      |
| P53460.0003 | P53460.INM16X130CIN | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 130 | -          | 60      |
| P53460.0004 | P53460.INM16X150CIN | 60 | 18 | 40 | 13 | 7 | 24 | M16   | 150 | -          | 60      |
| P53460.0006 | P53460.INM20X90CIN  | 60 | 18 | 40 | 16 | 7 | 24 | M20   | 90  | -          | 90      |

| Code        | Art.                | D  | H  | H1 | E  | s | R  | d16g | Q   | Weight (g) | F1 (kN) |
|-------------|---------------------|----|----|----|----|---|----|------|-----|------------|---------|
| P53460.0007 | P53460.INM20X110CIN | 60 | 18 | 40 | 16 | 7 | 24 | M20  | 110 | -          | 90      |
| P53460.0008 | P53460.INM20X130CIN | 60 | 18 | 40 | 16 | 7 | 24 | M20  | 130 | -          | 90      |
| P53460.0009 | P53460.INM20X150CIN | 60 | 18 | 40 | 16 | 7 | 24 | M20  | 150 | -          | 90      |
| P53460.0010 | P53460.INM20X170CIN | 60 | 18 | 40 | 16 | 7 | 24 | M20  | 170 | -          | 90      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.