

# P814



16

## SOLID MOUNTING FOOT WITH THREADED AND ARTICULATED STEM

Piedi in plastica - stelo snodato

### Materials:

Reinforced polyamide.

Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).


### Inserts:

Galvanized steel threaded stem with ball joint (thread tolerance 6g), with milled seat for adjustment wrench.

**Notes:** The base of mounting foot P814 can be used in combination with other handgrips in order to obtain a greater closing surface or thrust.

Special requests:



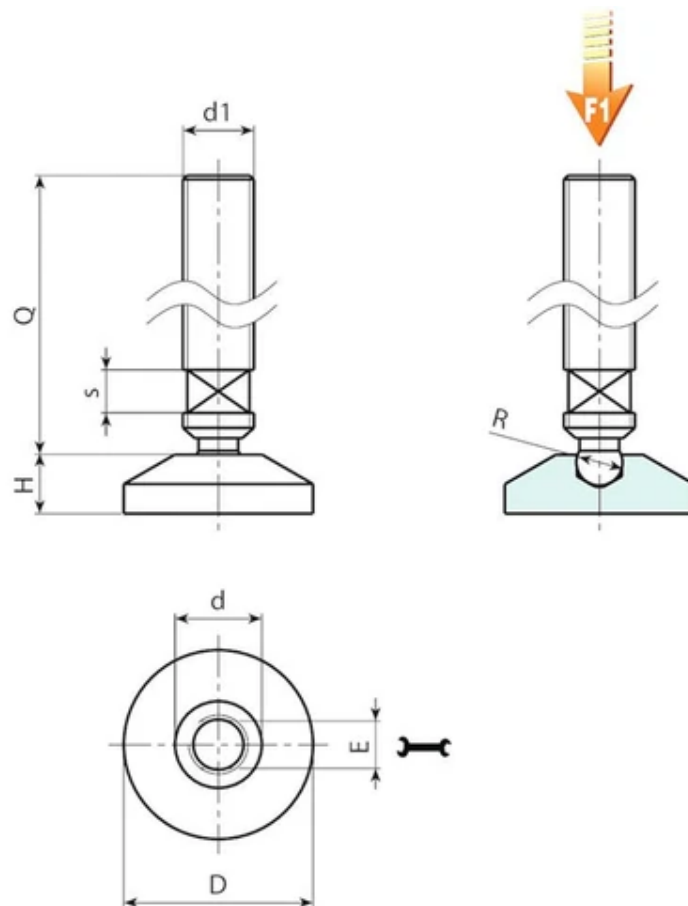

| Code         | Art.              | D  | H  | d    | E | s | R | d1  | Q  | Weight (g) | F1 (N) |
|--------------|-------------------|----|----|------|---|---|---|-----|----|------------|--------|
| P814032.0001 | P814032.TM10X5001 | 32 | 10 | 15.5 | 6 | 6 | 8 | M10 | 50 | 32         | 4000   |
| P814032.0002 | P814032.TM10X9001 | 32 | 10 | 15.5 | 6 | 6 | 8 | M10 | 90 | 53         | 4000   |
| P814032.0004 | P814032.TM12X5001 | 32 | 10 | 15.5 | 6 | 6 | 8 | M12 | 50 | 50         | 4000   |
| P814032.0005 | P814032.TM12X9001 | 32 | 10 | 15.5 | 6 | 6 | 8 | M12 | 90 | 90         | 4000   |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 150 pieces.