

P900ESD



16

SMALL MOUNTING FOOT - IN ESD MATERIAL - WITH STEEL ARTICULATED STEM TYPE A - BALL 12.4

Piedi in plastica - stelo snodato

Notes: This item is made from ESD-C (Electro Static Discharge – Conductive) material with fillers in compliance with standards EN IEC 61340-5-1. The product is conductive and prevents the formation of electrostatic discharges by facilitating its grounding. A yellow pad-printed symbol (ESD-C) enables correct identification of the product. Product suitable for the production of electronic material and for use in explosive atmospheres.

Materials:

Reinforced polyamide, with conductive fillers (ESD-C).

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

P900ESD:

Galvanised steel threaded and articulated stem (ball 12.4) with hexagonal base (thread tolerance 6g).


P900CINESD:

Stainless steel threaded and articulated stem (ball 12.4) with hexagonal base (Aisi 303) (thread tolerance 6g).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.



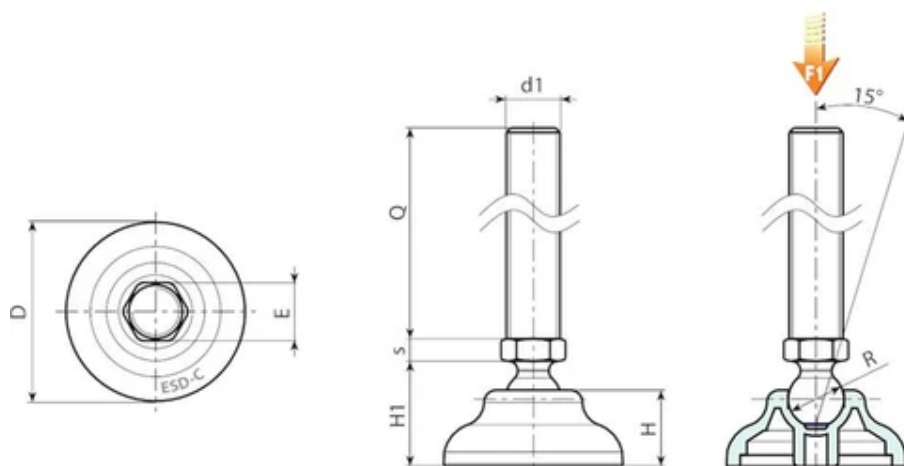

Version P900ESD: Mounting foot with stem type A (with hexagonal base) and ball 12.4

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90040.0027	P90040.TM08X4501ESD	40	17	23	13	5	12.4	M8	45	40	10
P90040.0028	P90040.TM08X7001ESD	40	17	23	13	5	12.4	M8	70	47	10
P90040.0029	P90040.TM10X4501ESD	40	17	23	13	5	12.4	M10	45	48	10
P90040.0030	P90040.TM10X7001ESD	40	17	23	13	5	12.4	M10	70	60	10
P90040.0031	P90040.TM10X10001ESD	40	17	23	13	5	12.4	M10	100	75	10
P90040.0032	P90040.TM12X4501ESD	40	17	23	13	5	12.4	M12	45	58	10
P90040.0033	P90040.TM12X7001ESD	40	17	23	13	5	12.4	M12	70	75	10
P90040.0034	P90040.TM12X10001ESD	40	17	23	13	5	12.4	M12	100	97	10
P90050.0025	P90050.TM08X4501ESD	50	18	24	13	5	12.4	M8	45	46	10
P90050.0026	P90050.TM08X7001ESD	50	18	24	13	5	12.4	M8	70	53	10
P90050.0027	P90050.TM10X4501ESD	50	18	24	13	5	12.4	M10	45	54	10
P90050.0028	P90050.TM10X7001ESD	50	18	24	13	5	12.4	M10	70	63	10
P90050.0029	P90050.TM10X10001ESD	50	18	24	13	5	12.4	M10	100	77	10
P90050.0030	P90050.TM12X4501ESD	50	18	24	13	5	12.4	M12	45	64	10
P90050.0031	P90050.TM12X7001ESD	50	18	24	13	5	12.4	M12	70	78	10
P90050.0032	P90050.TM12X10001ESD	50	18	24	13	5	12.4	M12	100	99	10
P90060.0030	P90060.TM08X4501ESD	60	20	26	13	5	12.4	M8	45	58	10
P90060.0031	P90060.TM08X7001ESD	60	20	26	13	5	12.4	M8	70	66	10
P90060.0032	P90060.TM10X4501ESD	60	20	26	13	5	12.4	M10	45	68	10
P90060.0033	P90060.TM10X7001ESD	60	20	26	13	5	12.4	M10	70	80	10
P90060.0034	P90060.TM10X10001ESD	60	20	26	13	5	12.4	M10	100	95	10

Code	Art.	D	H	H1	E	s	R	d16g	Q	Weight (g)	F1 (kN)
P90060.0035	P90060.TM12X4501ESD	60	20	26	13	5	12.4	M12	45	78	10
P90060.0036	P90060.TM12X7001ESD	60	20	26	13	5	12.4	M12	70	96	10
P90060.0037	P90060.TM12X10001ESD	60	20	26	13	5	12.4	M12	100	117	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Version P900CINESD: Mounting foot with stem type A (with hexagonal base) and ball 12.4 - stainless steel

Code	Art.	D	H	H1	E	s	R	d16g	Q	Weight (g)	F1 (kN)
P90040.0035	P90040.TM08X4501CINESD	40	17	23	13	5	12.4	M8	45	40	10
P90040.0036	P90040.TM08X7001CINESD	40	17	23	13	5	12.4	M8	70	47	10
P90040.0037	P90040.TM10X4501CINESD	40	17	23	13	5	12.4	M10	45	48	10
P90040.0038	P90040.TM10X7001CINESD	40	17	23	13	5	12.4	M10	70	60	10
P90040.0039	P90040.TM12X4501CINESD	40	17	23	13	5	12.4	M12	45	58	10
P90040.0040	P90040.TM12X7001CINESD	40	17	23	13	5	12.4	M12	70	75	10
P90040.0041	P90040.TM12X10001CINESD	40	17	23	13	5	12.4	M12	100	99	10
P90050.0033	P90050.TM08X4501CINESD	50	18	24	13	5	12.4	M8	45	46	10
P90050.0034	P90050.TM08X7001CINESD	50	18	24	13	5	12.4	M8	70	53	10
P90050.0035	P90050.TM10X4501CINESD	50	18	24	13	5	12.4	M10	45	54	10
P90050.0036	P90050.TM10X7001CINESD	50	18	24	13	5	12.4	M10	70	63	10
P90050.0037	P90050.TM12X4501CINESD	50	18	24	13	5	12.4	M12	45	64	10
P90050.0038	P90050.TM12X7001CINESD	50	18	24	13	5	12.4	M12	70	78	10
P90050.0039	P90050.TM12X10001CINESD	50	18	24	13	5	12.4	M12	100	102	10
P90060.0038	P90060.TM08X4501CINESD	60	20	26	13	5	12.4	M8	45	58	10
P90060.0039	P90060.TM08X7001CINESD	60	20	26	13	5	12.4	M8	70	66	10
P90060.0040	P90060.TM10X4501CINESD	60	20	26	13	5	12.4	M10	45	68	10
P90060.0041	P90060.TM10X7001CINESD	60	20	26	13	5	12.4	M10	70	80	10
P90060.0042	P90060.TM12X4501CINESD	60	20	26	13	5	12.4	M12	45	78	10
P90060.0043	P90060.TM12X7001CINESD	60	20	26	13	5	12.4	M12	70	96	10
P90060.0044	P90060.TM12X10001CINESD	60	20	26	13	5	12.4	M12	100	120	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.