

R208CIN

INOX

max
4 Km/h

+60°
-20°

PA6

PU

RoHS
COMPLIANT

18

180000/180000 2, 18000 180000 22 2222 (2222 22)

Nylon/Polyurethane wheels

22:

2 22(1):

22222 22 2 22222 22

222(2):

22 22 22222 22 60 ± 5 22 D.

22 22:

2222

22:

(1) 22 22

(2) 22 (Ral 3013).

(3-4-5-6) 22 22222 22

2 22(4):

22 22 222 2222 2222 2222222. 2222 22 2222 222 22 2222222(AISI 304) 222 22

222

222(3):

22222 22(AISI 304) 22, 222 2222 22

22 222(5):

222222(AISI 304) 22 22222 22 2222222(AISI 420) 2 222, 222 422 222 22 2

22 22 2222 22222 222222

2 22(6):

222222(AISI 304) 22 22 222 2222222(AISI 304) 222 222222


22 22 22:

22 2, 22 202 22 22222 22 22 22222 222 22 2222 22 2 2222 (22 22 R208CIN2

R238CIN22 22).



© Copyright
Boteco srl - Bergamo

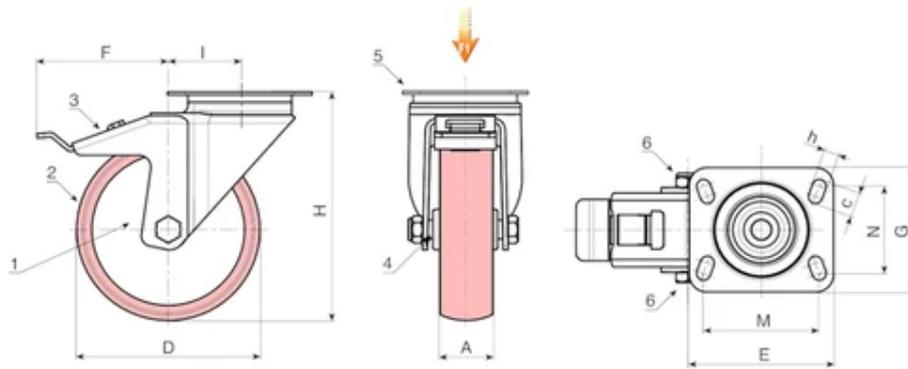

??	art.	D	A	H	I	E	G	M	N	c	h	F	??(g)	F1 (Kg)
R208080.0002	R208080.T30P080X060CIN	80	30	108	32	95	80	80	60	12	9	110	558	100
R208100.0002	R208100.T30P080X060CIN	100	30	127	32	95	80	80	60	12	9	110	616	130
R208125.0002	R208125.T35P080X060CIN	125	35	155	32	95	80	80	60	12	9	113	760	130
R208150.0002	R208150.T40P080X060CIN	150	40	184	35	95	100	80	60	12	9	115	-	140
R208200.0002	R208200.T50P105X080CIN	200	50	240	48	129	106	105	80	23	11	150	2602	300