

R209CIN

INOX

max
4 Km/h

+60°
-20°

PA6

PU

RoHS
COMPLIANT

18

180000/180000 180 1800 180000 180 180

Nylon/Polyurethane wheels

18:

1800(1):

180000 180 180000 180

1800(2):

1800 18000000 180 60 ± 5 180 D.

180000:

180000

180:

(1) 180000

(2) 180 (Ral 3013).

(3-4-6) 180 18000000 180

1800(4):

180 180 1800 180000 180000000 180000 180 180000 1800 180000000(AISI 304) 1800 180

1800

1800(3):

1800 18000000 180(AISI 304) 180000, 180000 180 1800 180000

1800(6):

18000000(AISI 304) 180 180 1800 18000000(AISI 304) 1800 18000000


180000 1800:

1800 180 180 200 180 180000 180 180 180000 1800 1800 180 180000 (180 180 R209CIN 180

R239CIN 180 180).



© Copyright
BOTECA srl - Unipersonale

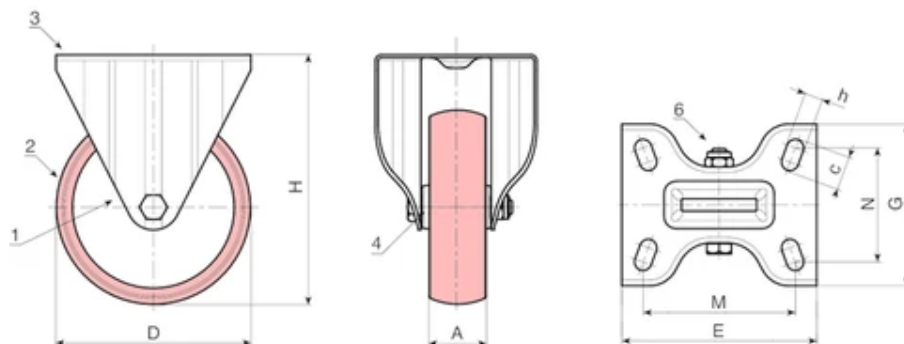

??	art.	D	A	H	E	G	M	N	c	h	??(g)	F1(Kg)
R209080.0002	R209080.T30P080X060CIN	80	30	108	100	84	80	60	12	9	379	100
R209100.0002	R209100.T30P080X060CIN	100	30	127	100	84	80	60	12	9	394	130
R209125.0002	R209125.T35P080X060CIN	125	35	155	100	84	80	60	12	9	550	180
R209150.0002	R209150.T40P080X060CIN	150	40	184	100	84	80	60	12	9	529	140
R209200.0002	R209200.T50P105X080CIN	200	50	240	135	110	105	80	23	11	1686	300