

MALE CONNECTOR FOR PANEL

Attacchi rapidi DINS

Materials:

Phenolic resin.

Resistant to oils and greases.

Resistant to high temperatures.

Surface finish:

Glossy.

Colour:

Black (RAL 9011).

Inserts:

(1) Brass insert with male connector UNI.

(4) F25-00:

Black-oxyde treated steel toothed washer DIN 6798.

(4) F35-00:

Black-oxyde treated steel corrugated washer DIN 137.

(4) F70-95:

Black-oxyde treated steel corrugated washer DIN 137.

(5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.


(7) Yellow passivated steel washer.

(8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:

None.



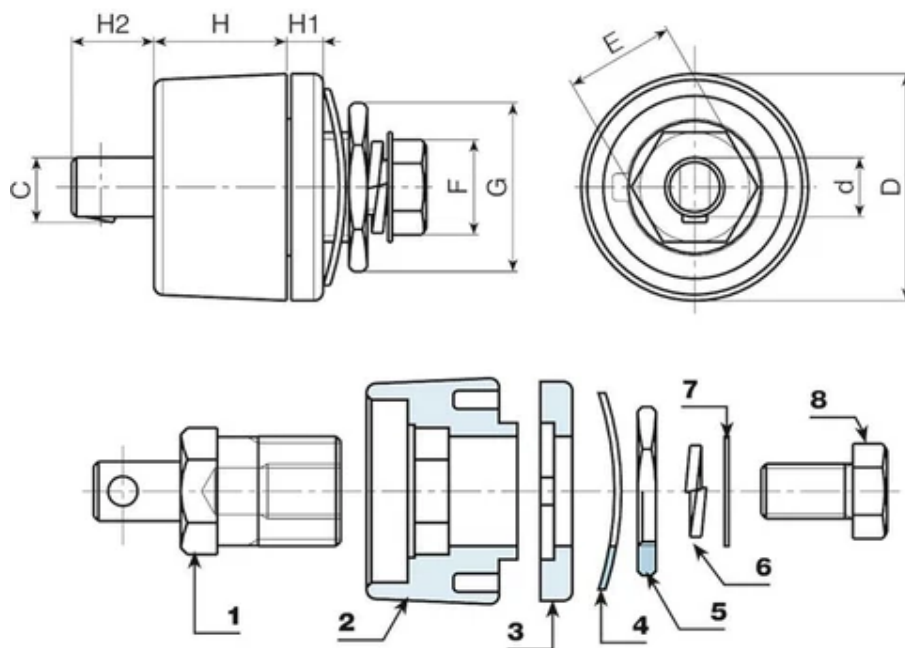

Code	art.	D	H	H1	H2	d	c	E	F	G	Weight (g)	Amp. Max
S114.0001	S114.M2500	33	14	4	7	9	9.5	14	13	22	60	200
S114.0002	S114.M3550	50.5	29	7	9	13	14	21	17	27	194	400
S114.0003	S114.M7000	50.5	29	7	9	13	14	24	19	32	242	500