

S114

+170°
-20°

PF



19

???

Quick couplings DINS

??	??
----	----

???

???

?? ??

??

?? (RAL 9011).

???

(1) UNI

(4) F25-00:

DIN 6798 □□□ □□ □□ □□ □□ □□ □□ □□ □□

(4) F35-00:

DIN 137 [][] [][] [][] [][] [][] [][] [][]

(4) F70-95:

DIN 137 [?] [?] [?] [?] [?] [?] [?] [?].

[illegible]

(6) [] [] [] [] [] [] [] [] [] [] UNI 1751.

(7)

?	?
---	---

?	?	?
---	---	---

?	?	?
---	---	---

?	?
---	---

?	?
---	---



.

(8) DIN933/UNI 5739.

?? ?? ??

??



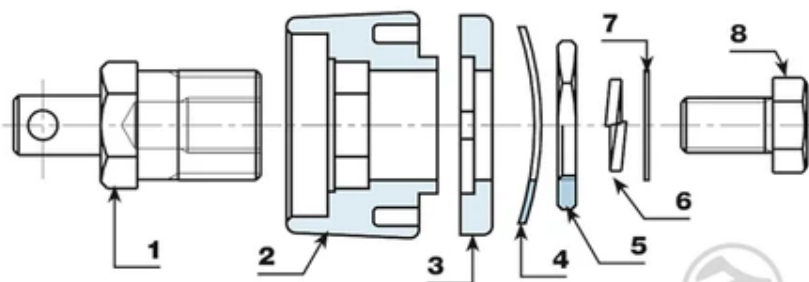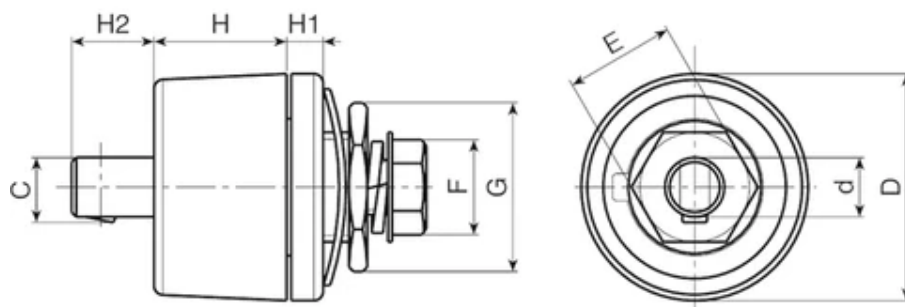

© Copyright
Boteco srl Unipersonale

??	art.	D	H	H1	H2	d	c	E	F	G	??(g)	Amp. Max
S114.0001	S114.M2500	33	14	4	7	9	9.5	14	13	22	60	200
S114.0002	S114.M3550	50.5	29	7	9	13	14	21	17	27	194	400
S114.0003	S114.M7000	50.5	29	7	9	13	14	24	19	32	242	500