

22

KNOB WITH LOCKING FULL STAINLESS STEEL INDEXING PLUNGER - WITH NUT

Spintori filettati passo fine - Inox integrale

Materials:

- (1) Stainless steel plunger pin (Aisi 303).
- (2) Threaded stainless steel hexagon ring nut (Aisi 303).
- (3) Stainless steel spring (Aisi 301).
- (4) Turned stainless steel lobed knob (Aisi 303).
- (5) Stainless steel fixing screw (Aisi 304).

Surface finish:

Satin.

Colour:

Natural.

ATTENTION:


- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.

Special Requests:

Upon request and for special quantities the plunger can be supplied completely disassembled.

On request the nut can be supplied disassembled.



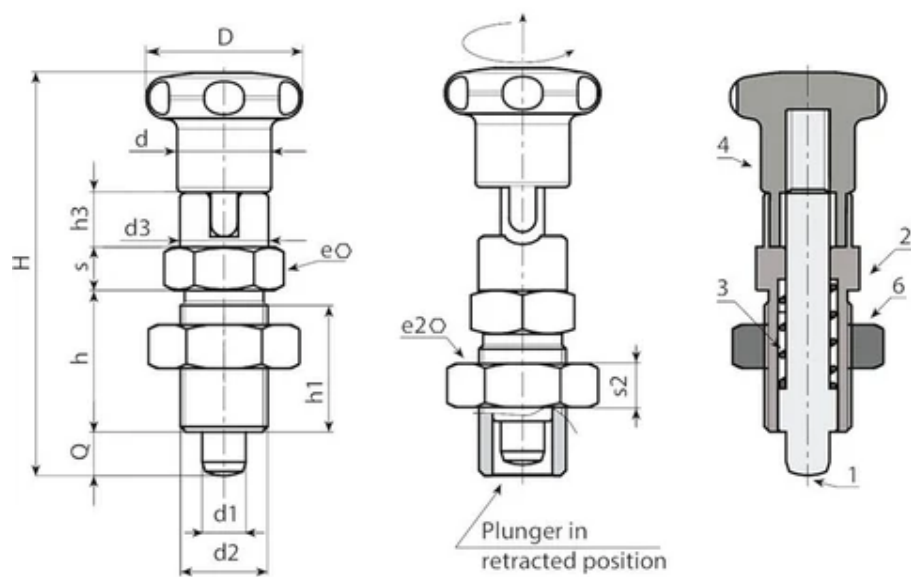

Version W723 CIN - with nut

Code	Art.	D	H	h	h1	h3	d3	d2	d	e	s	e2	s2	d1 -0,02-0,04	Q	Weight (g)
W723.0001	W723.I0501CIN	22	52	17	15	6.5	12	M10x1	12	12	5	17	6	5	5	-
W723.0002	W723.I0601CIN	27	61	20	18	7.5	14	M12x1,5	14	14	6	19	7	6	6	-
W723.0004	W723.I0801CIN	32	77	26	23	9.5	19	M16x1,5	19	19	8	24	8	8	8	-
W723.0005	W723.I1001CIN	33	90	33	30	11.5	19	M20x1,5	20	22	10	30	9	10	10	240