

KNOB WITH LOCKING STEEL INDEXING PLUNGER

Spintori filettati passo fine - con pomello

Materials:

(3) Stainless steel spring (Aisi 301).

(4) Reinforced polyamide lobed knob. Cannot be disassembled.
Resistant to oils and greases.

W810:

(2) Threaded high-resistance steel hexagon ring nut.

(1) Hardened high resistance steel plunger pin.

W810CIN:

(2) Threaded stainless steel hexagon ring nut (Aisi 303).

(1) Stainless steel plunger pin (Aisi 303).

Surface finish:

(4) Satin.

(1-2) Smooth.

Colour:

(4) Black (RAL 9011).

W810:

(1-2) Black-oxide treated.

W810 CIN:

(1-2) Natural.


ATTENTION:

> We recommend an H7 tolerance for the plunger stem bore.

Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.



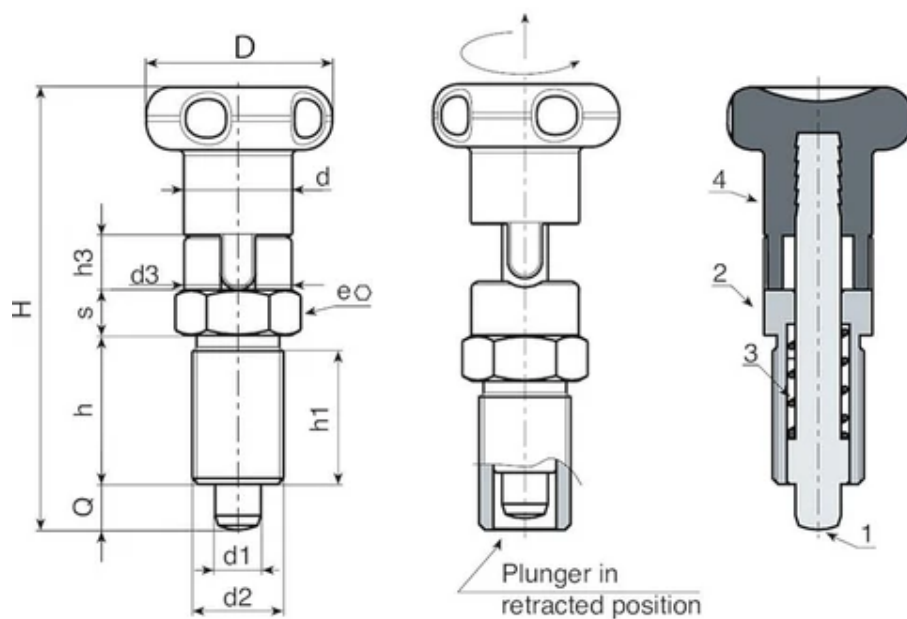

Version W810 - black-oxide treated steel

Code	Art.	D	H	h	h1	h3	d3	d2	d	e	s	d1-0,02-0,04	Q	Weight (g)
W810.0005	W810.Q0501	22	51.5	17	15	6.5	11.8	M10x1	12	12	5	5	5	22
W810.0006	W810.Q0601	27	61.5	20	18	7.5	13.8	M12x1,5	14	14	6	6	6	37
W810.0007	W810.Q0801	33	77.5	26	23	9.5	18.8	M16x1,5	19	19	8	8	8	87
W810.0008	W810.Q1001	33	90.5	33	30	11.5	18.8	M20x1,5	19	22	10	10	10	142

Version W810 CIN - stainless steel (Aisi 303)

Code	Art.	D	H	h	h1	h3	d3	d2	d	e	s	d1-0,02-0,04	Q	Weight (g)
W810.0001	W810.I0501CIN	22	51.5	17	15	6.5	11.8	M10x1	12	12	5	5	5	22
W810.0002	W810.I0601CIN	27	61.5	20	18	7.5	13.8	M12x1,5	14	14	6	6	6	37
W810.0003	W810.I0801CIN	33	77.5	26	23	9.5	18.8	M16x1,5	19	19	8	8	8	87
W810.0004	W810.I1001CIN	33	90.5	33	30	11.5	18.8	M20x1,5	19	22	10	10	10	142