

KNOB WITH STEEL INDEXING PLUNGER, LONG NOSE PIN AND LOCK NUT

Spintori filettati passo fine - con pomello

Materials:

(3) Stainless steel spring (Aisi 301).

(4) Reinforced polyamide lobed knob. Cannot be disassembled.
Resistant to oils and greases.

W913:

(2) Threaded high-resistance steel hexagon ring nut.

(1) Hardened high resistance steel plunger pin.

(5) Threaded steel lock nut (UNI 5589).

W913CIN:

(2) Threaded stainless steel hexagon ring nut (Aisi 303).

(1) Stainless steel plunger pin (Aisi 303).

(5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).



Surface finish:

(4) Satin.

(1-2-5) Smooth.

Colour:

(4) Black (RAL 9011).

W913:

(1-2-5) Black-oxide treated.

W913CIN:

(1-2-5) Natural.



ATTENTION:


> We recommend an H7 tolerance for the plunger stem bore.

> The nut is supplied assembled.

Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.

On request the nut can be supplied disassembled.

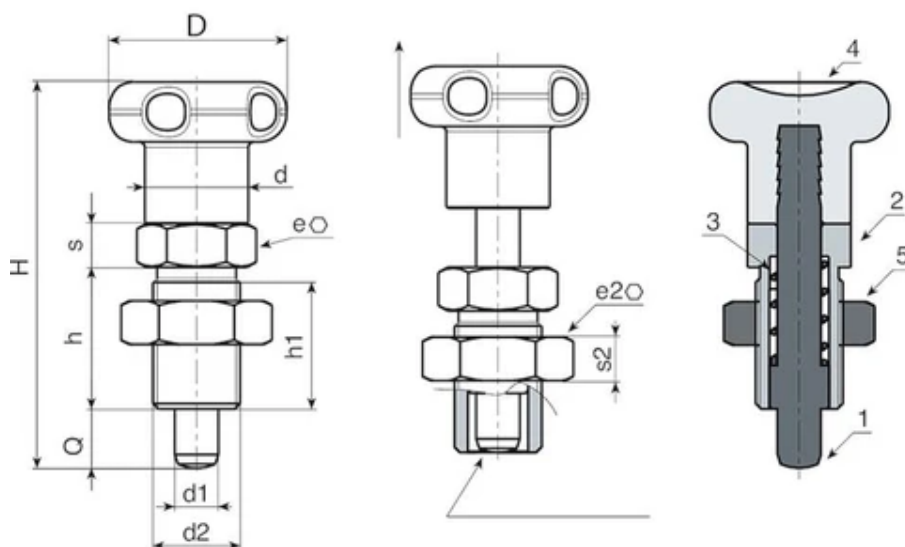

Version W913 - black-oxide treated steel

Code	Art.	D	H	h	h1	d2	d	e	s	e2	s2	d1 -0,02 -0,04	Q	Weight (g)
W913010.0001	W913010.Q05X0801	22	48	17	15	M10x1	12	12	5	17	6	5	8	25
W913012.0001	W913012.Q06X0901	27	57	20	18	M12x1,5	14	14	6	19	7	6	9	41
W913016.0006	W913016.Q08X1201	33	72	26	23	M16x1,5	19	19	8	24	8	8	12	89
W913016.0007	W913016.Q10X1201	33	72	26	23	M16x1,5	19	19	8	24	8	10	12	89
W913020.0002	W913020.Q12X1501	33	84	33	30	M20x1,5	19	22	10	30	9	12	15	153

Code	Art.	D	H	h	h1	d2	d	e	s	e2	s2	d1 -0,02 -0,04	Q	Weight (g)
W913010.0002	W913010.I05X0801CIN	22	48	17	15	M10x1	12	12	5	17	6	5	8	25
W913012.0002	W913012.I06X0901CIN	27	57	20	18	M12x1,5	14	14	6	19	7	6	9	41
W913016.0005	W913016.I08X1201CIN	33	72	26	23	M16x1,5	19	19	8	24	8	8	12	89
W913016.0001	W913016.I10X1201CIN	33	72	26	23	M16x1,5	19	19	8	24	8	10	12	89
W913020.0001	W913020.I12X1501CIN	33	84	33	30	M20x1,5	19	22	10	30	9	12	15	153