

## KNURLED CONTROL KNOB FOR INDICATOR K650-50

Pomelli con sede per indicatore gravitazionale

### Materials:

Reinforced polyamide. Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Mountable indicator:

Gravity position indicator type K650050. The indicator can be only used in a vertical position (horizontal machine axis). The indicator must be purchased separately. For further information see article K650.

### Insert:

Galvanised steel insert with smooth through bore (tolerance H10).

### Fixing method:

The knob is fixed to the shaft by means of the threaded radial hole (d4) (grub screw not supplied).

### Indicator fixing method:

Fix the indicator with a threaded grub screw M4 (not supplied) to be inserted in the hole d6.

### Special Requests:


On request and with a minimum of 50 pieces, the inserts can be supplied with the hole d1 with H7 tolerance and black-oxide finish.

Upon request and for special quantities inserts can be supplied with custom hole diameter d1.

Upon request and for special quantities inserts can be supplied in different materials.

Upon request the control knob can be supplied with a grey ring. The code for this product is: K96178.TD080116.



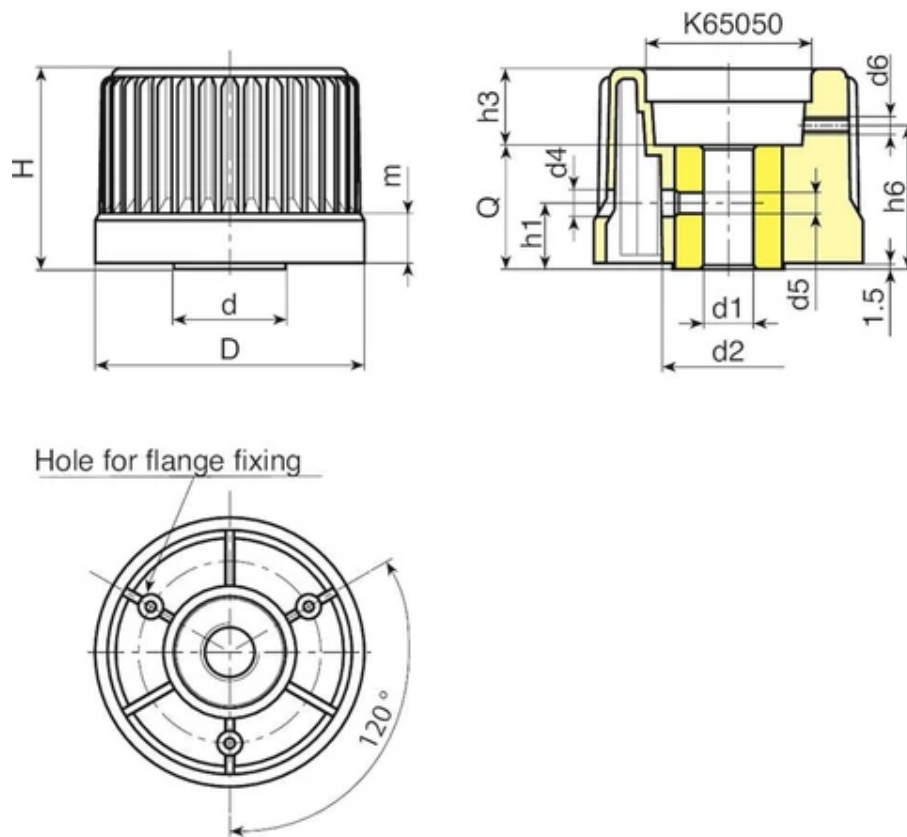

Code	art.	D	H	m	d	d2	d4	d5	d6	h1	h3	h6	Dm	d1 H10	Q	Weight (g)
K96078.0002	K96078.TD0801	78	56	15	31	36	6.5	M6	M4	18	24	38.5	18	8	32	230

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated).  
Dm = Maximum obtainable diameter for subsequent machining (widening).