# **R158**











# POLYAMIDE MONOLITHIC WHEEL WITH RECTANGULAR SWIVEL STEEL PLATE WITH BEARING - WITH BRAKE (HEAVY DUTY)

Ruote in Nylon monolitico

#### **Materials:**

Wheel body (1):

Polyamide. Resistant to oils and greases.

Tread (2):

Polyamide. Resistant to oils and greases.

#### Surface finish:

Smooth.

#### Colour:

(1-2) Natural white.

(3-4-5-6) Galvanised blue.

### Wheel rotation (4):

A pair of steel ball bearings is inserted to provide excellent rollability.

#### Bracket (3):

Extra-thick steel (DD13) fork, with integrated brake.

# Rotating assembly (5):

Steel rotating assembly with double ball race, assembled with steel screw grade 8.8 and rectangular swivel plate with four slotted mounting holes.

## Wheel fastening (6):


Steel hex head screw, coupled with a self-locking steel nut.

### **Special requests:**

Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R158 with code no. R148).





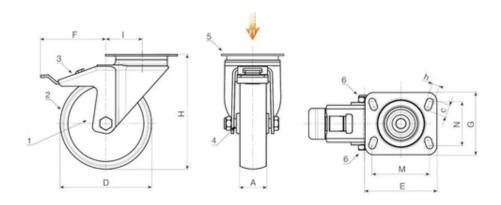

Code	art.	D	Α	Н	1	Е	G	М	N	С	h	F	Weight (g)	F1 (Kg)
R158100.0001	R158100.T35P080X060	100	35	135	47	100	84	80	60	12	9	99	-	370
R158125.0001	R158125.T35P080X060	125	35	161	51	100	84	80	60	12	9	100	-	380
R158125.0002	R158125.T45P105X080	125	45	164	61	132	110	105	80	23	12	104	-	600
R158150.0001	R158150.T40P105X080	150	40	188	45	132	110	105	80	23	12	108	-	330
R158150.0002	R158150.T45P105X080	150	45	195	60	132	110	105	80	23	12	107	-	600
R158200.0001	R158200.T50P105X080	200	50	242	59	132	110	105	80	23	12	109	-	600

