

21

## SMOOTH STAINLESS STEEL BALL PLUNGER WITH PLASTIC OR STEEL NOSE PIN

Pressore a molla liscio con sfera

### Materials:

Stainless steel plunger body (Aisi 303).

### Surface finish:

Smooth.

### Colour:

Body:

Natural.

Nose pin:

W605POM:

Natural white.

W605CIN:

Natural.

### Nose pin:

W605POM:

Plastic nose pin (POM - Delrin).

W605CIN:

Turned stainless steel nose pin (Aisi 303).

### Type of spring thrust:

Normal.


### Spring:

Stainless steel spring (Aisi 301).

### Special requests:

None.



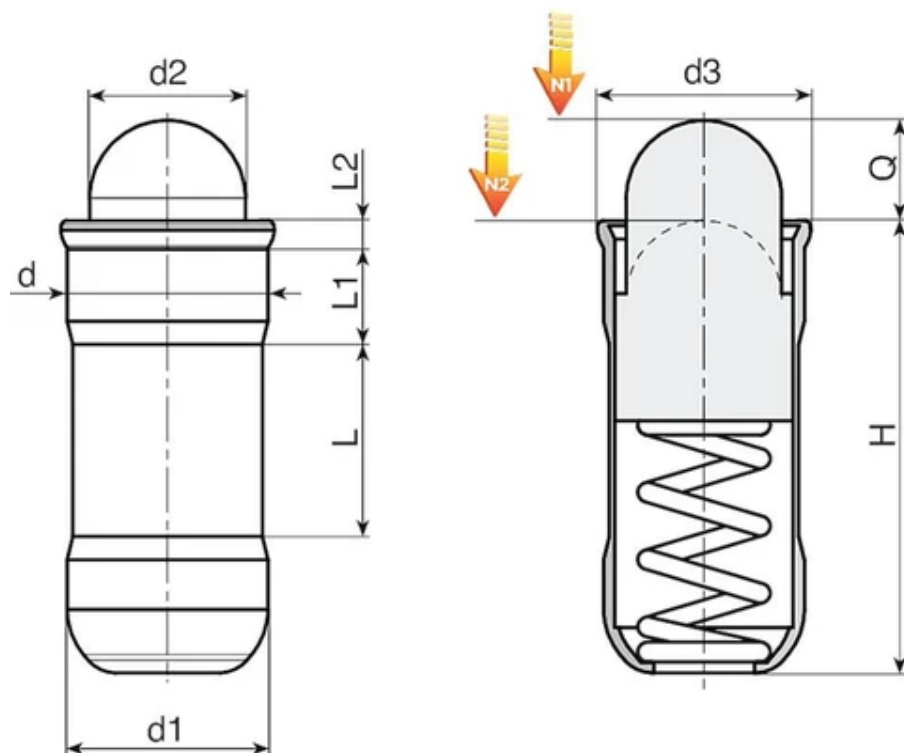

#### Version W605POM: with white plastic nose pin (POM)

| Code      | art.          | d +0,1 | d2  | d3  | H    | L    | L1  | L2  | N1 (N) | N2 (N) | d1 (±0.05) | Q   | Weight (g) |
|-----------|---------------|--------|-----|-----|------|------|-----|-----|--------|--------|------------|-----|------------|
| W605.0002 | W605.IND04POM | 4      | 2,8 | 4,6 | 10,7 | 5,6  | 1,8 | 0,9 | 3      | 8,2    | 4          | 2,7 | 1          |
| W605.0004 | W605.IND05POM | 5      | 3,8 | 5,6 | 12   | 6    | 2,1 | 0,9 | 3,3    | 9      | 5          | 4   | 1          |
| W605.0006 | W605.IND06POM | 6      | 4,8 | 6,5 | 15   | 8,2  | 2,3 | 1   | 6,1    | 12     | 6          | 5,5 | 1,1        |
| W605.0008 | W605.IND08POM | 8      | 6,2 | 8,5 | 18   | 9,5  | 2,9 | 1,1 | 10,7   | 17     | 8          | 6,5 | 2,3        |
| W605.0010 | W605.IND10POM | 10     | 8   | 11  | 26   | 14,3 | 4,2 | 1,5 | 16,2   | 29     | 10         | 8   | 5          |

#### Version W605CIN: with stainless steel nose pin (Aisi303)

| Code      | art.          | d +0,1 | d2  | d3  | H    | L    | L1  | L2  | N1 (N) | N2 (N) | d1 (±0.05) | Q   | Weight (g) |
|-----------|---------------|--------|-----|-----|------|------|-----|-----|--------|--------|------------|-----|------------|
| W605.0001 | W605.IND04CIN | 4      | 2,8 | 4,6 | 10,7 | 5,6  | 1,8 | 0,9 | 3      | 8,2    | 4          | 2,7 | 0,7        |
| W605.0003 | W605.IND05CIN | 5      | 3,8 | 5,6 | 12   | 6    | 2,1 | 0,9 | 3,3    | 9      | 5          | 4   | 1,2        |
| W605.0005 | W605.IND06CIN | 6      | 4,8 | 6,5 | 15   | 8,2  | 2,3 | 1   | 6,1    | 12     | 6          | 5,5 | 2,2        |
| W605.0007 | W605.IND08CIN | 8      | 6,2 | 8,5 | 18   | 9,5  | 2,9 | 1,1 | 10,7   | 17     | 8          | 6,5 | 4,2        |
| W605.0009 | W605.IND10CIN | 10     | 8   | 11  | 26   | 14,3 | 4,2 | 1,5 | 16,2   | 29     | 10         | 8   | 9          |