

21

SCREW-TYPE SPRING BALL PLUNGER

Pressore a molla filettato con sfera

Materials:

W620:

Turned free-cutting steel screw, with hexagon socket head.

W620CIN:

Turned stainless steel screw (Aisi 303), with hexagon socket head.

Surface finish:

Smooth.

Colour:

W620:

Black-oxide treated.

W620CIN:

Natural.

Ball:

Hardened stainless steel ball (Aisi 420).

Spring:

Stainless steel spring (Aisi 301).


Type of spring thrust:

Normal.

Special requests:

None.



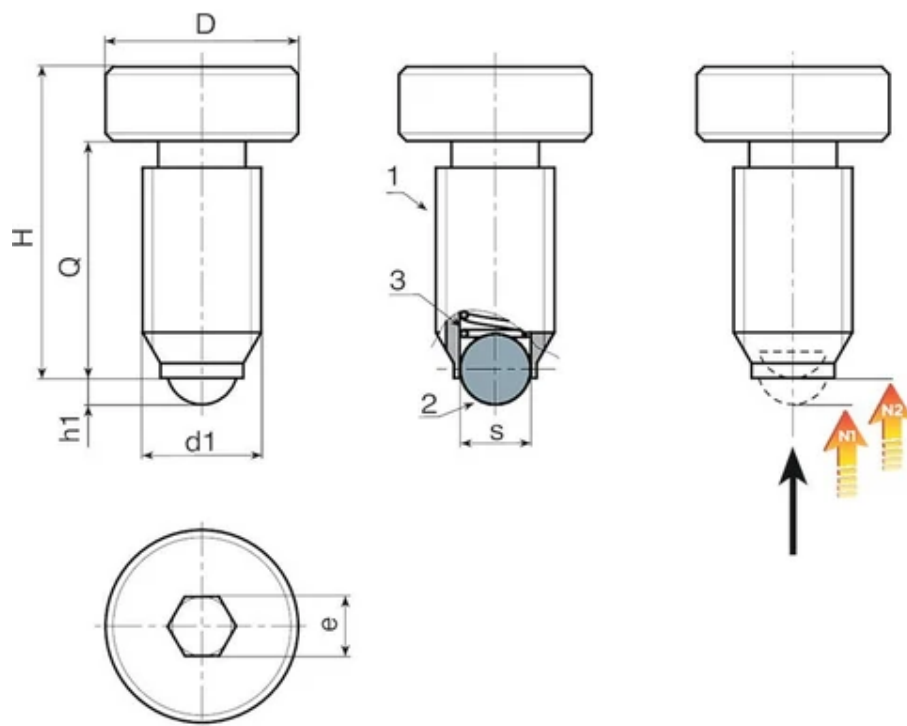

Version W620 - black-oxide treated steel

Code	art.	D (+0 -0.2)	H	h1	e	s	N1 (N)	N2 (N)	d1 6g	Q	Weight (g)
W620.0005	W620.VBM06X12	10	16	1	3	3.5	9	9	M6	12	4
W620.0006	W620.VBM08X16	13	21	1.5	4	5	15	15	M8	16	9
W620.0007	W620.VBM10X20	16	26	2	5	6	20	20	M10	20	17
W620.0008	W620.VBM12X25	18	32	2.5	6	8	30	30	M12	25	27

Version W620 CIN - stainless steel (Aisi 303)

Code	art.	D (+0 -0.2)	H	h1	e	s	N1 (N)	N2 (N)	d1 6g	Q	Weight (g)
W620.0001	W620.INM06X12CIN	10	16	1	3	3.5	9	9	M6	12	4
W620.0002	W620.INM08X16CIN	13	21	1.5	4	5	15	15	M8	16	9
W620.0003	W620.INM10X20CIN	16	26	2	5	6	20	20	M10	20	17
W620.0004	W620.INM12X25CIN	18	32	2.5	6	8	30	30	M12	25	27